

## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face and single face.

## FEATURES


- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Input Voltage: 120/277VAC 60HZ
- Super bright SMD LED 2x1W
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Battery Backup: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II, Range: 8m<sup>2</sup>
- Operating Temperature: -14°F~104°F
- 3.6V 300mAh Nickel-Cadmium battery, light last more than 90 minutes after power failure.

## HOUSING


Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish. Aesthetically pleasing, curved face, rounded corner design. Test switch provided.

## MOUNTING

EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

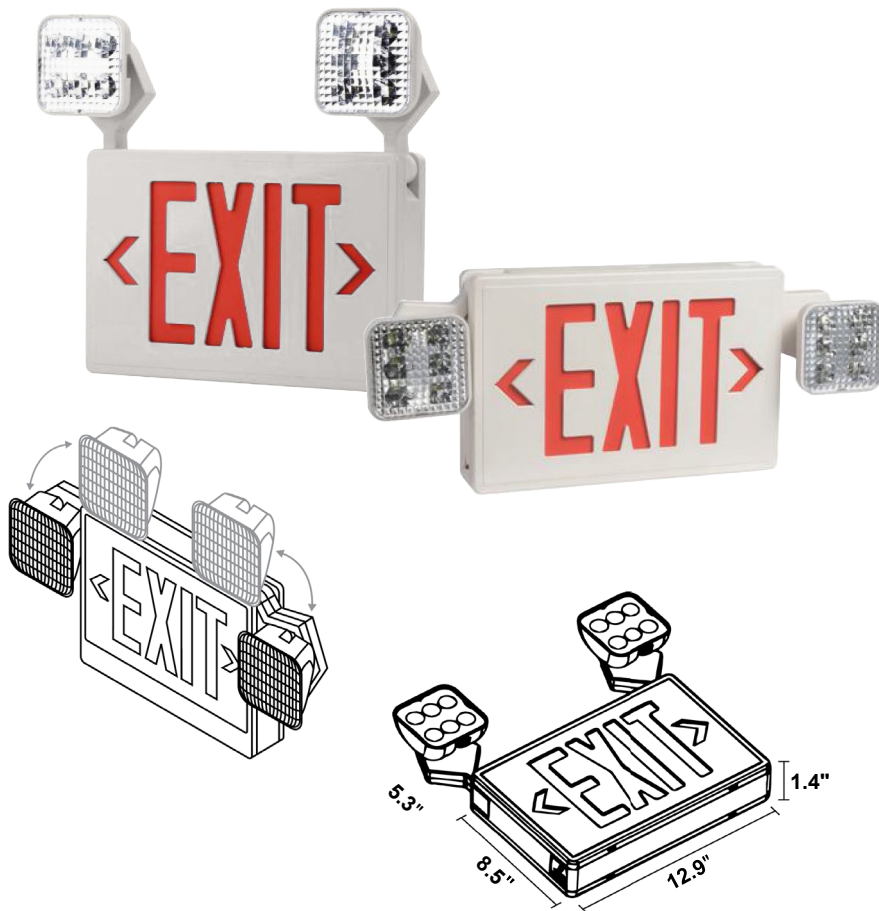

## Example: LE-CXPL-U1-RW-N-2SA

Series	Face No.	Letter Color	Battery	LED Light	Listings
LE-CXPL EXIT Sign with 2 emergency lights	U1 Single face	RW RED letters  GW GREEN letters	N Nickel-cadmium batteries	2SA 2LT Square Adjustable	

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.