

DESCRIPTION

This LED bullet landscape light features selectable wattage (12W/30W) and field-adjustable CCT, providing flexibility for a wide range of outdoor applications. An adjustable beam spread from 25° to 65° allows for precise illumination, from narrow accent lighting to broader area coverage—all in a single fixture.

Construction

- Sealed die-casting profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- Glass diffuser

Feature

- Selectable color temperature 3000K/4000K/5000K.
- Selectable Wattage, 12W/9W/6W & 30W/20W/10W
- High performance UV stabilized optical grade polymer refractor lenses to achieve desired distribution.
- Adjustable beam, 25-degree - 65-degree Beam Angle
- Built-in Photocell

Electrical

- Universal 12V AC/12-24V DC input voltage.
- 0-10V dimmable 100% down to 10%.
- Both drivers have a power factor >90%, THD <20%.
- Operating Temperature Range: -40°C to 40°C (-40°F - + 104°F).

Controls

- Built-in Photocell

Project:	Date
Type:	
Model:	



ORDER INFORMATION

EXAMPLE: LLI-WS30-X-CCTS-BK



Series	Wattage Selectable	Voltage	CCTS	Finish
LLI Bullet Flood Light	WS12 (12W / 9W / 6W)	X 12VAC/12-24VDC	CCTS Selectable Color Temperature (3000K / 4000K / 5000K)	BZ Bronze
	WS30 (30W / 20W / 10W)			BK Black

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

LLI Bullet Flood Light (12VAC/12-24VDC)

Specifications & Measurements




PERFORMANCE

Model	Wattage	Lumens	Efficacy	CCTS	Adjustable Beam	LED	Power Factor	Current Max.	Frequency	Voltage
LLI-WS12	12W	1,080	90 lm/W	3000K / 4000K / 5000K	25° / 35° / 45° / 55° / 65°	COB	>0.9	1.3A	50/60Hz	12VAC/12-24VDC
	9W	540	60 lm/W							
	6W	270	45 lm/W							

Model	Wattage	Lumens	Efficacy	CCTS	Adjustable Beam	LED	Power Factor	Current Max.	Frequency	Voltage
LLI-WS30	30W	2,900	97 lm/W	3000K / 4000K / 5000K	25° / 35° / 45° / 55° / 65°	COB	>0.9	4A	50/60Hz	12VAC/12-24VDC
	20W	2,100	105 lm/W							
	10W	1,000	100 lm/W							


DIMENSIONS

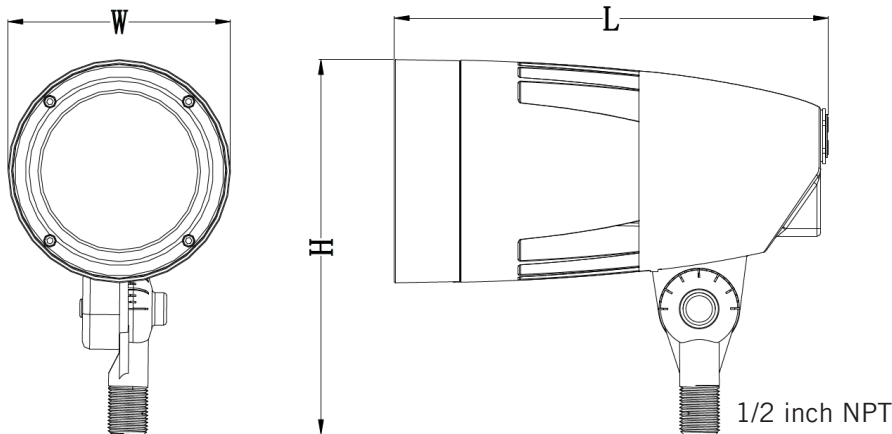

LLI-WS12
L 6.62in x W 3.37in x H 6.62

LLI-WS30
L 8.5in x W 4.25in x H 7.38

ADJUSTABLE BEAM / ADJUSTABLE CCT & POWER (EXAMPLE)

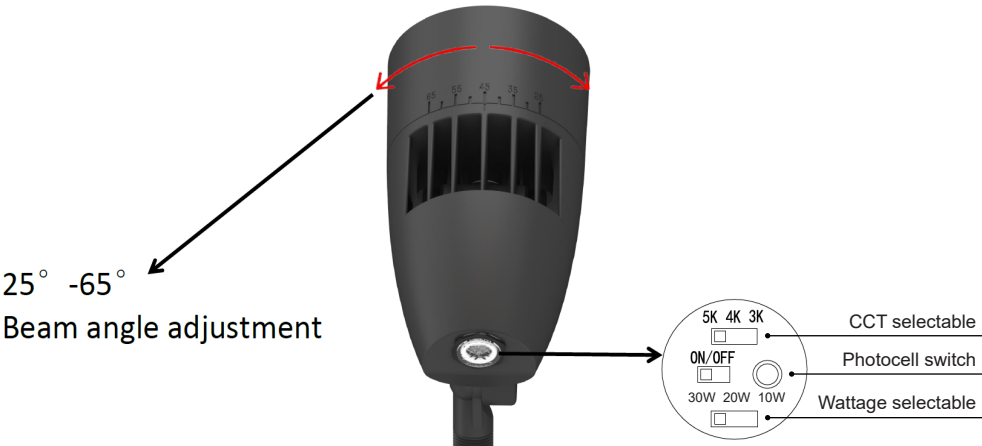

PHOTOMETRIC

