


Project: _____
 Type: _____
 Model: _____

Specifications:

HOUSING MATERIALS	Extruded aluminum, powder coated
BRACKET	Chromeplated stainless steel SUS 304#
GLASS LENS	Tempered step glass. T=4mm
DIMMABLE	Yes*
WATER-TIGHT CABLE GLAND	IP68
REFLECTOR	Optical reflector 15° / 20° / 30° / 50°
OPERATING TEMPERATURE	-4°F to 113°F
FIXTURE IP/ IK Rating	IP66 Rated / IK02

OPTICS




Optional Accessory




SO Type

Single cable, open wire type




TO Type

Twin cables, open wire type




SP Type

Single cable, plug type



TP Type

Twin cables, plug type

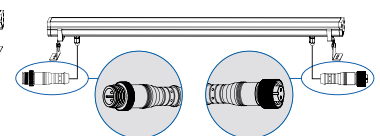

Example: RLG-9L40K-D40-X-SV / Static Color: RLG-B-D40-X-SV

Series	Lumens (CCT)			Beam Angle				Voltage	Optional	Accessory	Finish
RLG 14.5 Watts	8L30K 8L (3000K) 864 Lumens	9L40K 9L (4000K) 920 Lumens	10L50K 10L (5000K) 1,080 Lumens	D15 15°	D20 20°	D30 30°	D50 50°	X X = 24 Volts	SO Single cable, open wire	Blank Standard	SV Silver
	R R (RED)	G G (GREEN)	B B (BLUE)						TO Two cable, open wire		
RLI 30 Watts	19L30K 19L (3000K) 1,976 Lumens	21L40K 21L (4000K) 2,100 Lumens	21L50K 21L (5000K) 2,140 Lumens					Requires remote 24V transformer. For dimming, refer to specs of transformer you are using.*	SP Single cable, plug type	BAG-6001 Bevel cut Anti-glare	
	R R (RED)	G G (GREEN)	B B (BLUE)						TP Two cable, plug type		

Enter configuration: _____

** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.


PERFORMANCE DATA

Series	RLG	RLI
Power	14.5W (12x 1.0W)	30W (24x 1.0W)
Lumens	864 (30K) 920 (40K) 1,080 (50K)	1,976 (30K) 2,100 (40K) 2,140 (50K)
IP Rating	IP66	IP66
Operating Temp.	-4°F to 113°F	-4°F to 113°F
Input	24V	24V

ANTI-GLARE DIMENSIONS








Anti-glare shield optional accessory.

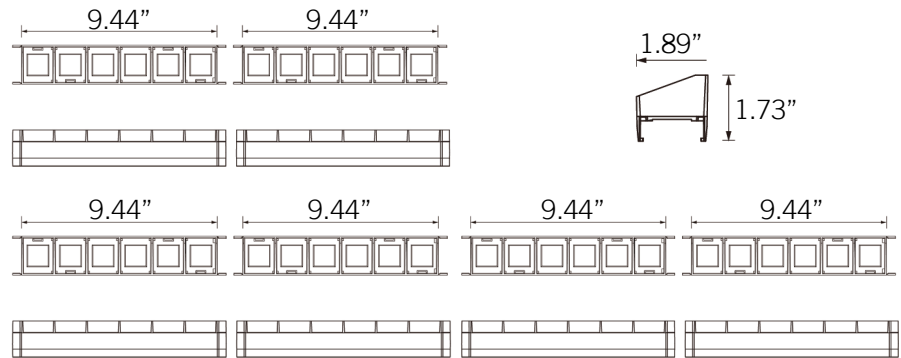

DIMENSIONS




ADJUSTABLE

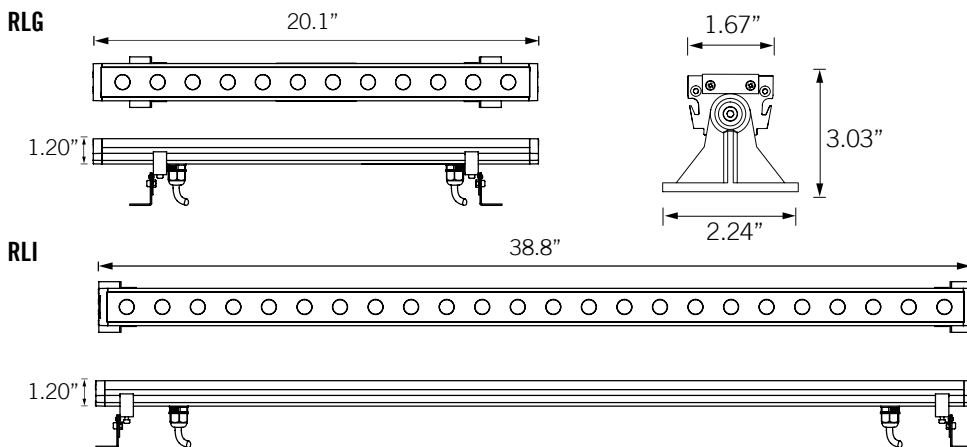

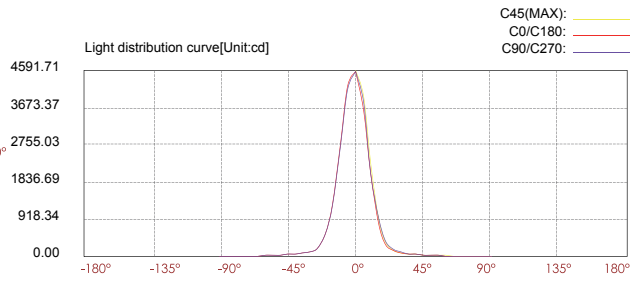

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	1141.64 LUX	0.7m	0.7m
4m	285.41 LUX	1.5m	1.5m
6m	126.85 LUX	2.2m	2.2m
8m	71.35 LUX	3.0m	3.0m
10m	45.67 LUX	3.7m	3.7m
12m	31.71 LUX	4.4m	4.4m
Ver.Spread:20.9H		oriz.Spread:20.9	

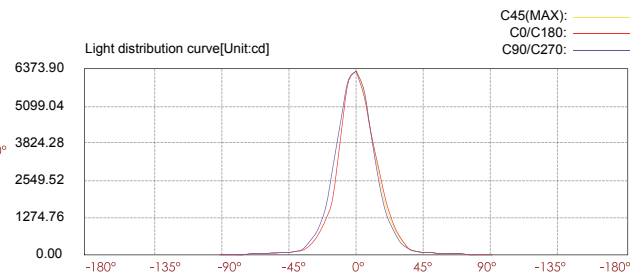

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	1570.93 LUX	1.0m	0.9m
4m	392.73 LUX	2.0m	1.9m
6m	174.55 LUX	2.9m	2.8m
8m	98.18 LUX	3.9m	3.7m
10m	62.84 LUX	4.9m	4.7m
12m	43.64 LUX	5.9m	5.6m
Ver.Spread:27.4		Horiz.Spread:26.3	