


LSP SERIES

TECHNICAL SPECIFICATIONS

EASY INSTALLATION

INSTALL ON ANY POLE

With a well designed bracket support all the post-top lights models are very easy and flexible to install on any 3 inch pole.

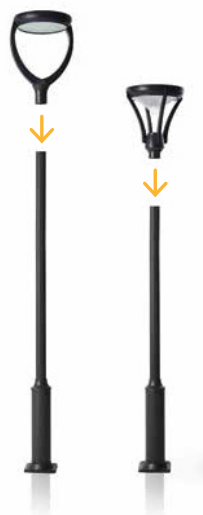

SOLAR PANEL

33 to 45 Watts 18V

Encapsulated Monocrystalline Solar Panel with Tempered Glass.



LED CHIPS

FROM 1,800 to 2,600 LUMENS

PHILLIPS LED Chips of 130 Lumens per Watts. LEDs are mounted to PC boards and directly attached to upper housing for best thermal management.

MICROWAVE

MOTION SENSOR


360° coverage, invisible and integrated to the luminaire housing. 4 meters radius detection.



OPERATION MODE

The post-tops are fitted with Dusk to Dawn photocell.

**Out the box factory default setting pre-programmed mode number 4*

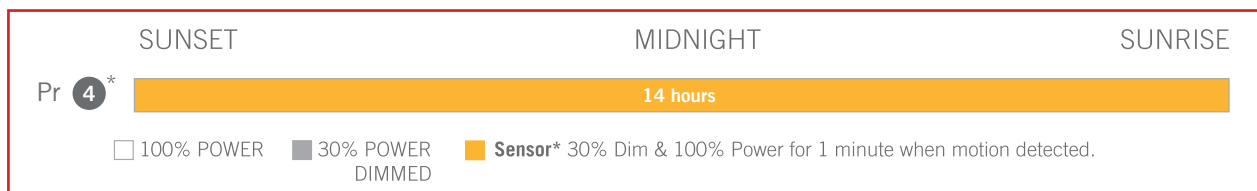

LUMINAIRE HOUSING

High pressure die-cast low-copper aluminum. Protection class (IP66). It uses a high quality Polyester Powder Coating from AKZO NOBEL. This powder coating products provide an excellent salt and humidity resistance as well as ultra violet resistance for color retention.



** IR Remote control available for purchase if needed*