


DESCRIPTION

High-performance LED roadway and area luminaire featuring a durable die-cast aluminum housing, precision optics for uniform illumination, and a modular replaceable LED engine for simplified maintenance. Available with 0-10V dimming, DALI, and programmable driver options, plus 20kV surge protection. UV-resistant powder-coated finish, 304 stainless steel hardware, and smart control compatibility ensure long-lasting reliability in demanding outdoor applications.

Features:

- Body:** Die-casting aluminum.
- Optical system:** Anodized aluminum reflector and flat or lenticular tempered glass cover.
- Output Power:** 40W / 60W / 75W
- CCT:** 3000K / 4000K / 5000K
- Input Power:** 120-277VAC
- Surge protection:** up to 20kV
- IP Rating:** IP66
- Impact resistance:** IK09

Project:	Date
Type:	
Model:	

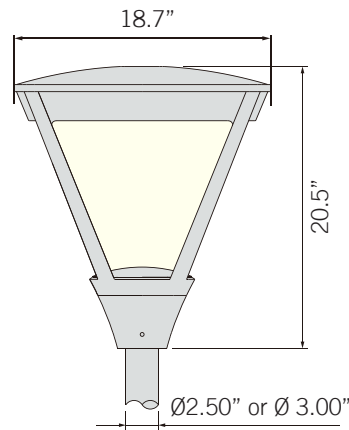

PERFORMANCE

Series	Wattage	Lumens	CCT	Frequency	Voltage	Net Weight	Gross Weight
SWZ	40W	3,900	3000K, 4000K, 5000K	50/60Hz	120-277V	12.8lb	14.9lb
	60W	5,800					
	75W	7,500					

Example: SWZ-75W-40K-5M-Y-BK



Series	Wattage	CCT	Optics	Voltage	Dimming Options	Finish
SWZ LED Post Top goose-neck	40W 40 Watts	30K 3000K	2M Type 2	Y Y = 120-277V	Leave Blank Non-dimmable	BK Black  Black RAL9005
	60W 60 Watts	40K 4000K	3M Type 3			WH White  White RAL9010
	75W 75 Watts	50K 5000K	4M Type 4			SV Silver  Silver RAL9007
			5M Type 5			CUS Custom finish available**

Enter configuration:

** Special Order

SWZ POST TOP

Power Selectable LED Post Top / 120-277V

