

DESCRIPTION

This LED bullet landscape light features selectable wattage (15W/30W) and field-adjustable CCT, providing flexibility for a wide range of outdoor applications. An adjustable beam spread from 25° to 65° allows for precise illumination, from narrow accent lighting to broader area coverage—all in a single fixture.

Construction

- Sealed die-casting profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- Glass diffuser

Feature

- Selectable color temperature 3000K/4000K/5000K.
- Selectable Wattage, 15W/10W/5W & 30W/20W/10W
- High performance UV stabilized optical grade polymer refractor lenses to achieve desired distribution.
- Adjustable beam, 25-degree - 65-degree Beam Angle
- Built-in Photocell

Electrical

- Universal 120-277 VAC input voltage.
- 0-10V dimmable 100% down to 10%.
- Both drivers have a power factor >90%, THD <20%.
- Operating Temperature Range: -40°C to 40°C (-40°F - + 104°F).

Controls

- Built-in Photocell

Project:	Date
Type:	
Model:	



ORDER INFORMATION

EXAMPLE: LLI-WS15-Y-CCTS-BZ



Series	Wattage Selectable	Voltage	CCTS	Finish
LLI Bullet Flood Light	WS15 (15W / 10W / 5W)	Y 120-277V	CCTS Selectable Color Temperature (3000K / 4000K / 5000K)	BZ Bronze
	WS30 (30W / 20W / 10W)			BK Black

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

LLI Bullet Flood Light (120-277VAC)

Specifications & Measurements




PERFORMANCE

Model	Wattage	Lumens	Efficacy	CCT	Adjustable Beam	LED	Power Factor	Current Max.	Frequency	Voltage
LLI-WS15	15W	1,280	85 lm/W	3000K / 4000K / 5000K	25° / 35° / 45° / 55° / 65°	COB	>0.9	0.2A	50/60Hz	120-277V
	10W	860	86 lm/W							
	5W	430	86 lm/W							

Model	Wattage	Lumens	Efficacy	CCT	Adjustable Beam	LED	Power Factor	Current Max.	Frequency	Voltage
LLI-WS30	30W	3,120	104 lm/W	3000K / 4000K / 5000K	25° / 35° / 45° / 55° / 65°	COB	>0.9	0.32A	50/60Hz	120-277V
	20W	2,050	103 lm/W							
	10W	1,020	102 lm/W							

DIMENSIONS

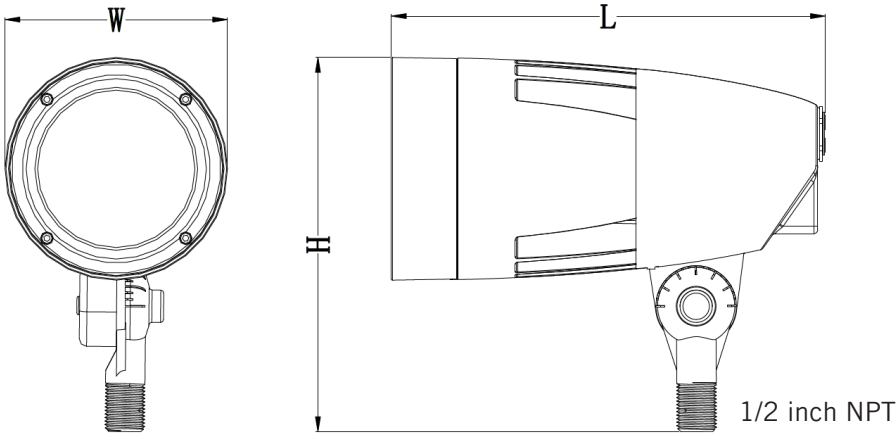


LLI-WS15

L 6.62in x W 3.37in x H 6.62

LLI-WS30

L 8.5in x W 4.25in x H 7.38

ADJUSTABLE BEAM / ADJUSTABLE CCT & POWER (EXAMPLE)

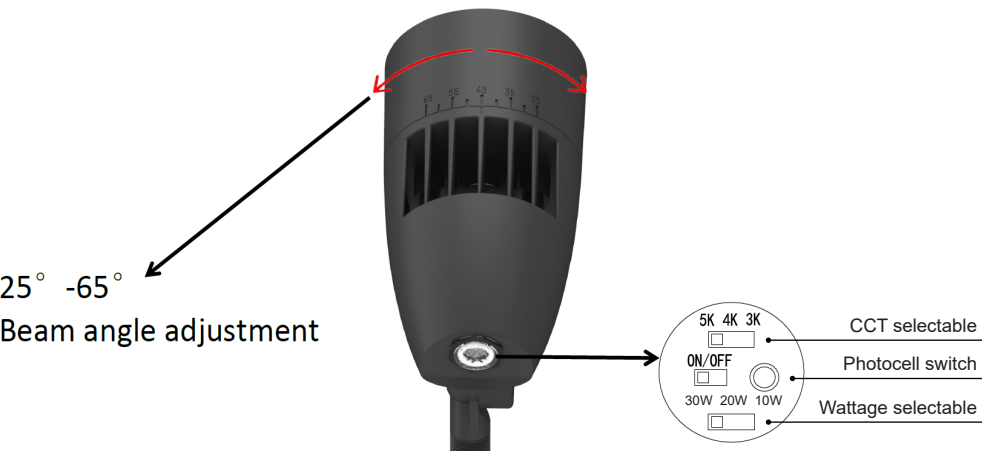

LLI Bullet Flood Light (120-277VAC)

Photometrics



PHOTOMETRIC

