

Project:	Date
Type:	
Model:	

DESCRIPTION

The 6" LED Square Panel Light, DL SP6, comprises a single trim featuring a sturdy die-cast body along with a J-Box equipped with a driver. Our low profile design make it easy for mounting in confined ceilings or narrow spaces. Rated for IC and damp locations, this easy-to-install fixture does not require a separate housing as it can be mounted directly into the ceiling.

PRODUCT SPECIFICATIONS

- White painted Die-cast body is appropriate for heat dissipation.
- 2 Spring clips per-installed on unit for easy installation.
- One light J-Box.

LED LIGHT ENGINE

- Protected LED driver performs at 120-277V (120V available).
- Dimming down to 10% with TRIAC dimmer (at 120V only).
- CCT: 3000K, 4000K, 5000K available
- CRI 90
- Long life LED chips guaranteed up to 50,000hours.


LISTINGS

- UL Listed
- Damp locations
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80

DL-SP6 6 IN SQUARE PANEL / 120-277V



DIMENSIONS

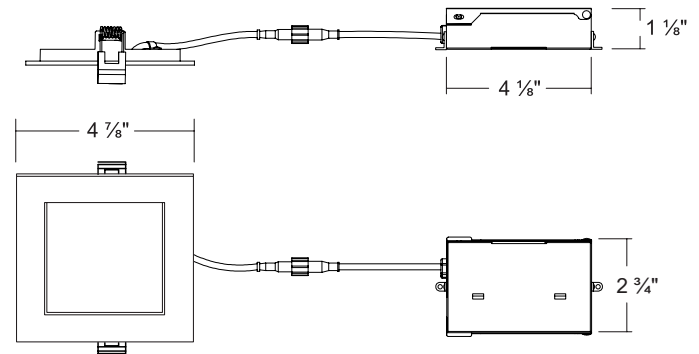

ORDER INFORMATION

EXAMPLE: DL-SP6-15-30K-Y-W



Series	Wattage	CCT	Voltage	Finish
DL-SP6 6 inch Square Panel	15 15 Watts	30K 3000K 40K 4000K 50K 5000K	Y Y = 120-277V* (Dims at 120V only) Z Z = 120V**	W White

Enter configuration:

** Special Order

PERFORMANCE DATA

Watts	CRI	CCT	Lumens	Voltage	Frequency
15W	90	3000K 4000K 5000K	1,030 Lm 1,120 Lm 1,125 Lm	Y Y = 120-277V* (Dims at 120V only) Z Z = 120V**	50/60Hz

PHOTOMETRIC

