

| | | |
|----------|--|------|
| Project: | | Date |
| Type: | | |
| Model# | | |

DCOV Series Linear LED Light

PRODUCT DESCRIPTION

The Luminoso DCOV Series is a sleek, multi-function, linear fixture that can be used in a wide range of applications. It can be used as a low profile fixture for general lighting or as a cove light to create a beautiful, evenly dispersed, ambient light. The DCOV series is available in 2, 3, and 4-foot lengths and in either 3000K, 4000K, or 5000K color temperatures. With lumen packages ranging from 1,650 to 3,300 lumens, this versatile product can be the answer to many difficult lighting solutions.



FEATURES

LED Chip

The active color management system maintains superior color consistency over time. Every fixture is tuned as a complete system to the optimal color point before shipment, ensuring consistent fixture to fixture color.

Heat Sink

The thermal management system's cooling design allows for even heat dispersement which minimizes heat concentration. This enables the LEDs to consistently run cooler, providing significant boosts to lifetime, efficacy, and color consistency.

Optical System

Proprietary optical system utilizes a unique combination of reflective and refractive optical components to achieve a uniform, comfortable appearance. Using high density laser pixels to emit even light. This product produces no glare.



Flex Connector



Connector

Standard Accessories



ORDER INFORMATION

EXAMPLE: DCOV3-14-25W-30K-J-Y



| Series | Watts | CCT | Voltage | Dimension (L x W x H) |
|------------------------|-------|-----------------------|----------------------|-----------------------|
| DCOV2-14-15W-XX-J-X-FR | 15W | 3000K / 4000K / 5000K | Z=120V Y=110-277V | 21.9 x 1.6 x 1.4 |
| DCOV3-14-25W-XX-J-X-FR | 25W | 3000K / 4000K / 5000K | Z=120V Y=110-277V | 33.5 x 1.6 x 1.4 |
| DCOV4-14-30W-XX-J-X-FR | 30W | 3000K / 4000K / 5000K | Z=120V Y=110-277V | 45.2 x 1.6 x 1.4 |





Enter configuration:

** Special Order / contact vendor

Series / Performance

| Series No. | DCOV2 | DCOV3 | DCOV4 |
|-----------------------|----------------------|--------------------|--------------------|
| Power | 15W | 25W | 30W |
| Lumens | 1,650 | 2,750 | 3,300 |
| Efficacy | 110 (Lm/W) | 110 (Lm/W) | 110 (Lm/W) |
| Input | 100-277V | 100-277V | 100-277V |
| CRI | 80 | 80 | 80 |
| Standard Lifetime | L70 minimum 50,000 | L70 minimum 50,000 | L70 minimum 50,000 |
| Operating Temperature | -4°F to 122°F | -4°F to 122°F | -4°F to 122°F |
| Dimmable | 120VAC Dimmable only | | |

Dimensions

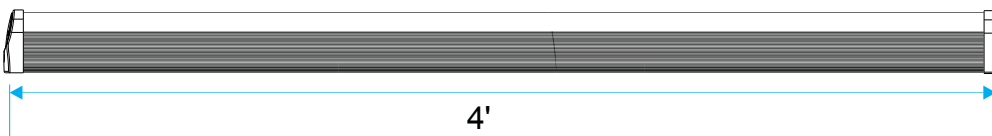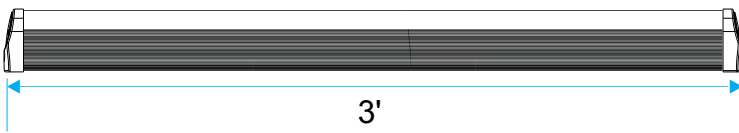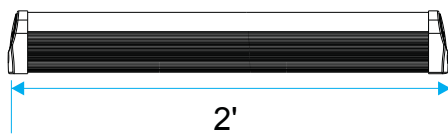

Linkable up to 200 Watts

