

DESCRIPTION

Introducing the latest innovation from Luminoso LED, the square halo LED fixture. Featuring a sleek design in your choice of white or black, this fixture combines style and practicality. Enhance your space with optional acoustic padding, available in a wide variety of colors. Designed for versatility, it offers both surface mount and suspension installation options. With CCT options of 3000K, 3500K, and 4000K, this fixture delivers the perfect lighting tone for any setting. Ideal for offices, hospitality, or residential spaces, it's the perfect blend of elegance and functionality.

FEATURES

- Aluminum housing, finished with powder coating
- Lens: PMMA
- Standard Black or White, Customized finish available
- Acoustic option available
- Surface mount or suspension
- Efficacy: 85 lm/W
- 80 CRI / 90 CRI options
- 120-277VAC 50/60Hz
- 0-10V dimming (dims down to 10%) or ON/OFF option
- CCT: 3000K, 3500K or 4000K
- LED chip: Samsung 2835, 3V, 150mA
- Power Factor: >0.9
- Damp Rated
- Operating Temperature: -5°F to 110°F
- Average life (L70) 50,000 hrs

Project:	Date
Type:	
Model:	



ORDER INFORMATION

EXAMPLE: NSKL-S-36W-35K-Y-90-F-NSAC 025 138-010-WH



Series	Wattage / Size	CCT	Voltage	CRI	Mounting	Acoustic Option	Dimming	Finish			
NSKL-S Soft Square	15W 15 Watts (D14.2in)	30K 3000K	Y 120-277V	80 80 CRI	F Flush Mount	Blank Standard	Blank Standard ON/OFF	WH White			
	25W 25 Watts (D17.7in)	35K 3500K		90 90 CRI	S Suspension Mount	NSAC XXX XXX Acoustic	010 0-10V dimming	BK Black			
	36W 36 Watts (D23.6in)	40K 4000K									
	50W 50 Watts (D31.5in)	Refer to page 3 for color options.									

Enter configuration:

* Contact manufacturer for custom finishes

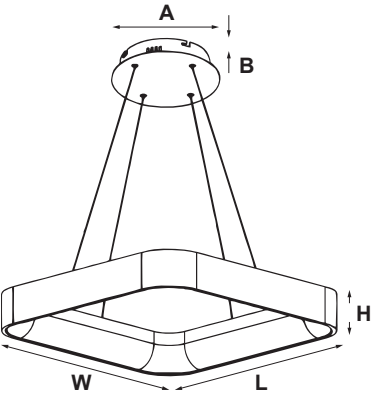
Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

NSKL-S Series

Sqaure LED Suspension / Surface mount




DIMENSIONS



(Suspension Mount) / Lumens & Wattage


Model	L	W	H	A	B	LUMENS / WATTAGE
NSKL-S Suspension	14.2"	14.2"	3.5"	10"	2.0"	1,275 / 15W
	17.7"	17.7"	3.5"	10"	2.0"	2,125 / 25W
	23.6"	23.6"	3.5"	10"	2.0"	3,060 / 36W
	31.5"	31.5"	3.5"	10"	2.0"	4,250 / 50W

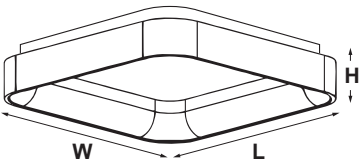


(Flush Mount) / Lumens & Wattage

Model	W	L	H	LUMENS / WATTAGE
NSKL-S Flush Mount	14.2"	14.2"	4.6"	1,275 / 15W
	17.7"	17.7"	4.6"	2,125 / 25W
	23.6"	23.6"	4.6"	3,060 / 36W
	31.5"	31.5"	4.6"	4,250 / 50W

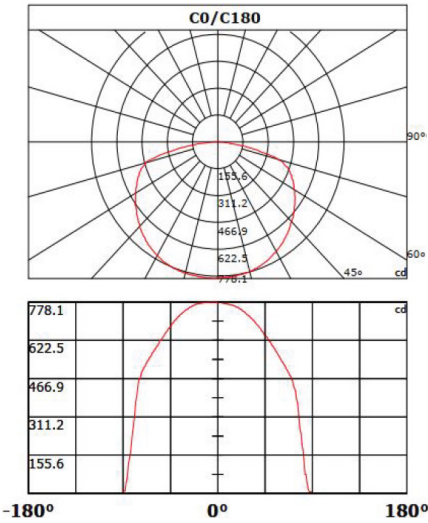PHOTOMETRIC (Light Distribution)



Beam Angle: 139.80° (50%Imax)


















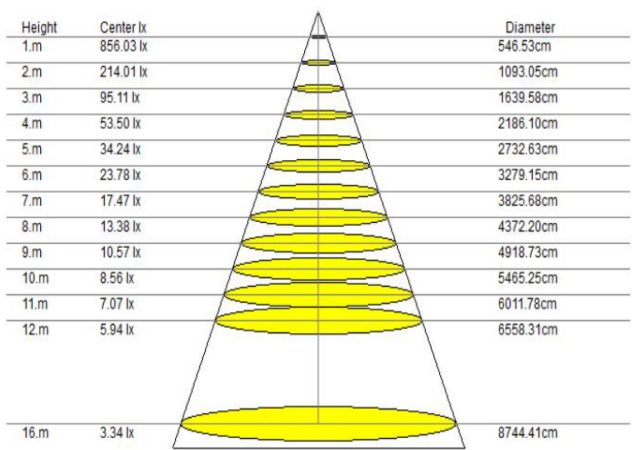


NSKL-S Series

Sqaure LED Suspension / Surface mount / Acoustic Color Options.



ACOUSTIC COLOR OPTIONS

 NSAC-001 141	 NSAC-002 122	 NSAC-003 120	 NSAC-004 123	 NSAC-025 138	 NSAC-031 108	 NSAC-056 131	 NSAC-024 117
 NSAC-005 107	 NSAC-006 106	 NSAC-007 145	 NSAC-008 129	 NSAC-042 146	 NSAC-043 115	 NSAC-055 142	 NSAC-028 110
 NSAC-009 140	 NSAC-019 126	 NSAC-011 135	 NSAC-012 133	 NSAC-033 103	 NSAC-034 102	 NSAC-035 101	 NSAC-036 105
 NSAC-013 111	 NSAC-014 144	 NSAC-021 130	 NSAC-016 104	 NSAC-038 127	 NSAC-039 143	 NSAC-040 124	 NSAC-057 132
 NSAC-017 147	 NSAC-018 125	 NSAC-022 119	 NSAC-020 128				

