

Project: _____

Type: _____


Model: _____

Features:

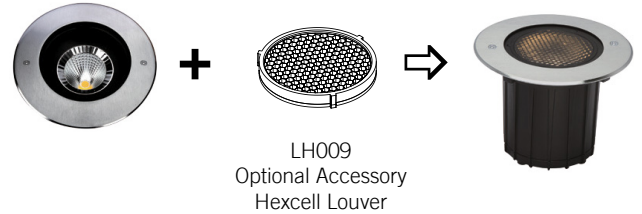

- HOUSING MATERIALS** | Die-casting dark grey powder coated aluminum
T=60~80 um./Adhesion of ISO class, 1.ATM class 4B
- FRONT COVER** | Chrome plated stainless steel SUS 316#
- GLASS LENS** | Tempered step glass. T=10mm
- DIMMABLE** | Yes*
- CONCRETE POUR KIT / SLEEVE** | ABS
- WATER-TIGHT CABLE GLAND** | IP68
- REFLECTOR** | Optical reflector 12°/ 22°/ 35°/ 55°
- LED** | NICHIA COB
- OPERATING TEMPERATURE** | -4°F to 104°F
- POWER CABLE** | H07RN-F 2X1.5mm² L=0.5m (low voltage)
- FIXTURE IP/ IK Rating** | IP66 Rated / IK10




RIF



RIG

OPTIONAL LOUVER

GLASS PRESSURE CAPACITY

OPTICS


RIF / RIG


Example: RIF-18L30K-D38-X-SS


Series	Lumens (CCT)			Beam Angle			Accessory	Voltage	Finish
RIF Round Inground 25 Watts	18L30K 18L (3000K) 1,849 Lumens	21L40K 21L (4000K) 2,151 Lumens	22L50K 22L (5000K) 2,200 Lumens	D12 12°	D25 25°	D38 38°	Leave Blank LH009 Hexcell Louver Accessory	X 24 Volts Requires remote 24V transformer. For dimming, refer to specs of transformer you are using.*	SS Stainless Steel 316
	RIG Square Inground 25 Watts								

Enter configuration: _____

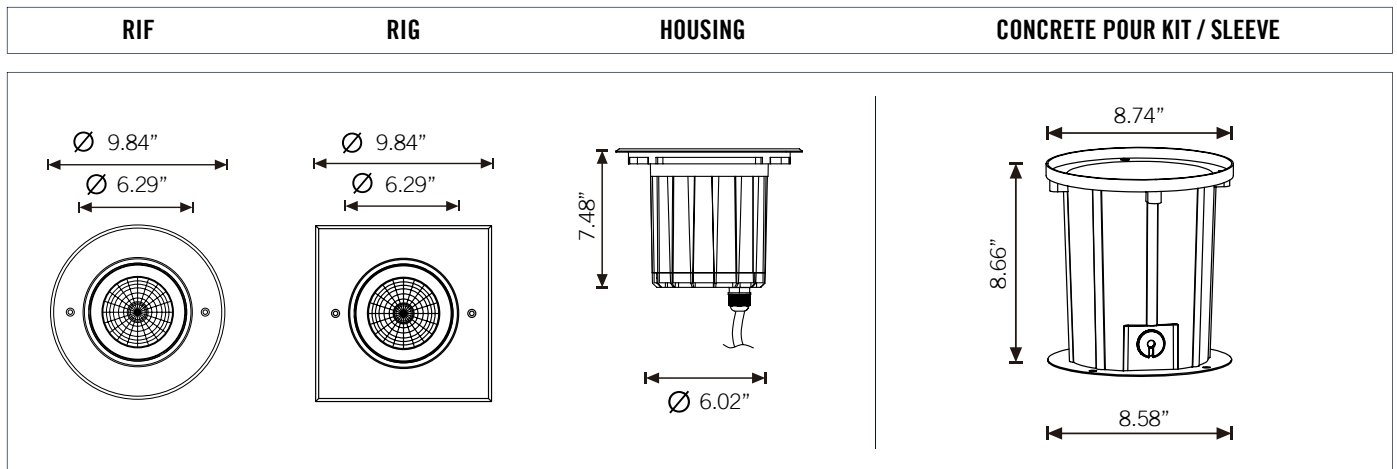
** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RIF	RIG
Power	25W	25W
Lumens	1,849 (30K) 2,151 (40K) 2,200 (50K)	1,849 (30K) 2,151 (40K) 2,200 (50K)
IP Rating	IP66	IP66
Operating Temp.	-4°F to 104°F	-4°F to 104°F
Input	24V	24V

DIMENSIONS



PHOTOMETRIC CURVES

