

Project:	
Types:	
Model#	

MWPK Series LED Wall Pack

PRODUCT DESCRIPTION

The Luminoso MWPK series combines traditional styling with the latest LED technology. This design is available in 45, and 70W watts. The high pressure die cast housing along with anti-static powder painting makes this product ideal for exterior applications. The MWPK's highly efficient cooling system allows lower running temperatures translating into a maximized product life. The wall pack has a built in UL class driver and is also rated for damp and wet locations. Ideal for entry ways, area perimeters, stairwells and hallways this product offers the added security and cost effectiveness to meet any demand.

PERFORMANCE SUMMARY

Efficacy: 118 - 119 Lm/W
Delivered Light Output: 5,223 - 8,100 Lumens
Power: 45-70 Watts
CRI: Ra>70
CCT: 4000K - 5000K
Input Voltage: 120 - 277 VAC
Power Factor: > 0.9 (120V)
IP Rating: IP65
Standard Warranty: 5 Years
Non-dimmable
Standard Lifetime: Designed to L70 minimum 50,000 hours
Qualifications: UL Listed



Dark Sky
Accessory
Sold Separately

ORDER INFORMATION

EXAMPLE: MWPK-14-70W-50K-3M-Y-BZ



Series	Mount	Wattage	CCT	Optics	Voltage	Finish	Options (Photocell)	Dark Sky
MWPK	14 = Direct Mount	45W 70W	40K = 4000K 50K = 5000K	3M = 180° (Half Round)	Y = 120-277V	WH = White BZ = Bronze	PC-120V PC-277V	US = Up-light Shield (Dark Sky Compliant)


Enter configuration:

** Special Order / contact vendor

Series / Performance


Series No.	MWPK-45W	MWPK-70W
Power	45W	70W
Lumens	(40K) 5,223 / (50K) 5,300	(40K) 7,950 / (50K) 8,100
Efficacy	118 LPW	119 LPW
Dimensions (L x W x H)	7.40 x 14.21 x 9.25 in	7.40 x 14.21 x 9.25 in
Input	120-277V	120-277V
Input Current	0.33 - 0.14 Amps (120-277V)	0.33 - 0.14 Amps (120-277V)

Dimensions

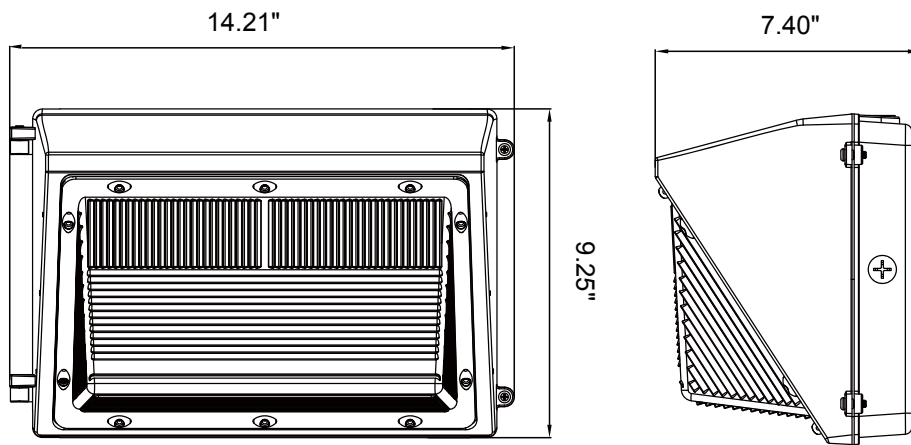

Photometric Data

45W

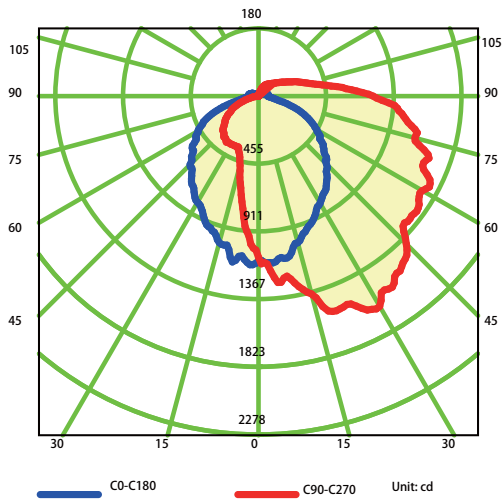

70W

