

## DESCRIPTION

Introducing the latest innovation from Luminoso LED, the round halo LED fixture. Featuring a sleek design in your choice of white or black, this fixture combines style and practicality. Enhance your space with optional acoustic padding, available in a wide variety of colors. Designed for versatility, it offers both surface mount and suspension installation options. With CCT options of 3000K, 3500K, and 4000K, this fixture delivers the perfect lighting tone for any setting. Ideal for offices, hospitality, or residential spaces, it's the perfect blend of elegance and functionality.

## FEATURES

- Aluminum housing, finished with powder coating
- Lens: PMMA
- Standard Black or White, Customized finish available
- Acoustic option available
- Surface mount or suspension
- Efficacy: 85 lm/W
- 80 CRI / 90 CRI options
- 120-277VAC 50/60Hz
- 0-10V dimming (dims down to 10%) or ON/OFF option
- CCT: 3000K, 3500K or 4000K
- LED chip: Samsung 2835, 3V, 150mA
- Power Factor: >0.9
- Damp Rated
- Operating Temperature: -5°F to 110°F
- Average life (L70) 50,000 hrs

|          |      |
|----------|------|
| Project: | Date |
| Type:    |      |
| Model:   |      |



## ORDER INFORMATION

EXAMPLE: NSKL-R-36W-35K-Y-90-F-NSAC 025 138-010-WH




| Series                           | Wattage / Size               | CCT          | Voltage       | CRI          | Mounting              | Acoustic Option                       | Dimming                  | Finish              |
|----------------------------------|------------------------------|--------------|---------------|--------------|-----------------------|---------------------------------------|--------------------------|---------------------|
| NSKL-R<br>Hallow Round luminaire | 15W<br>15 Watts<br>(D14.2in) | 30K<br>3000K | Y<br>120-277V | 80<br>80 CRI | F<br>Flush Mount      | Blank<br>Standard                     | Blank<br>Standard ON/OFF | WH<br>White         |
|                                  | 25W<br>25 Watts<br>(D17.7in) | 35K<br>3500K |               | 90<br>90 CRI | S<br>Suspension Mount | NSAC XXX XXX<br>Acoustic              | 010<br>0-10V dimming     | BK<br>Black         |
|                                  | 36W<br>36 Watts<br>(D23.6in) | 40K<br>4000K |               |              |                       |                                       |                          | C<br>Custom Finish* |
|                                  | 50W<br>50 Watts<br>(D31.5in) |              |               |              |                       | Refer to page 3<br>for color options. |                          |                     |

Enter configuration:

\* Contact manufacture for custom finishes


Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

DIMENSIONS

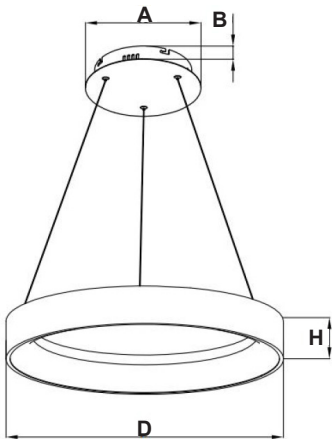

(Suspension Mount) / Lumens & Wattage


| Model                | D     | H    | A   | B    | LUMENS / WATTAGE |
|----------------------|-------|------|-----|------|------------------|
| NSKL-R<br>Suspension | 14.2" | 3.5" | 10" | 2.0" | 1,275 / 15W      |
|                      | 17.7" | 3.5" | 10" | 2.0" | 2,125 / 25W      |
|                      | 23.6" | 3.5" | 10" | 2.0" | 3,060 / 36W      |
|                      | 31.5" | 3.5" | 10" | 2.0" | 4,250 / 50W      |




(Flush Mount) / Lumens & Wattage

| Model                 | D     | H    | LUMENS / WATTAGE |
|-----------------------|-------|------|------------------|
| NSKL-R<br>Flush Mount | 14.2" | 4.6" | 1,275 / 15W      |
|                       | 17.7" | 4.6" | 2,125 / 25W      |
|                       | 23.6" | 4.6" | 3,060 / 36W      |
|                       | 31.5" | 4.6" | 4,250 / 50W      |

PHOTOMETRIC (Light Distribution)

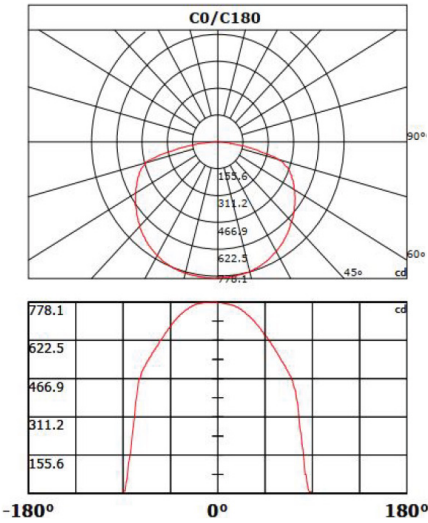

Beam Angle: 152.00° (50%Imax)

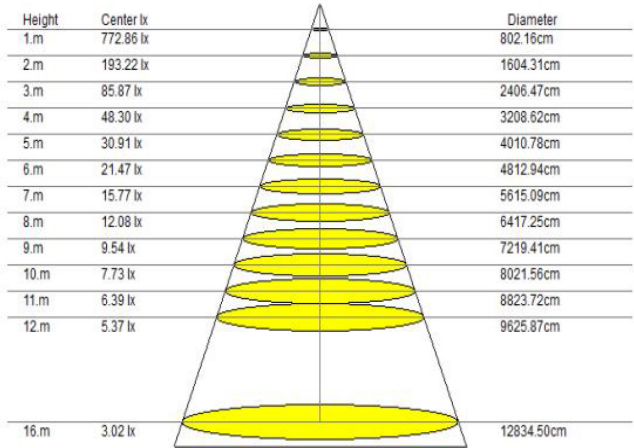


# NSKL-R Series

Round LED Suspension / Surface mount / Acoustic Color Options.



## ACOUSTIC COLOR OPTIONS

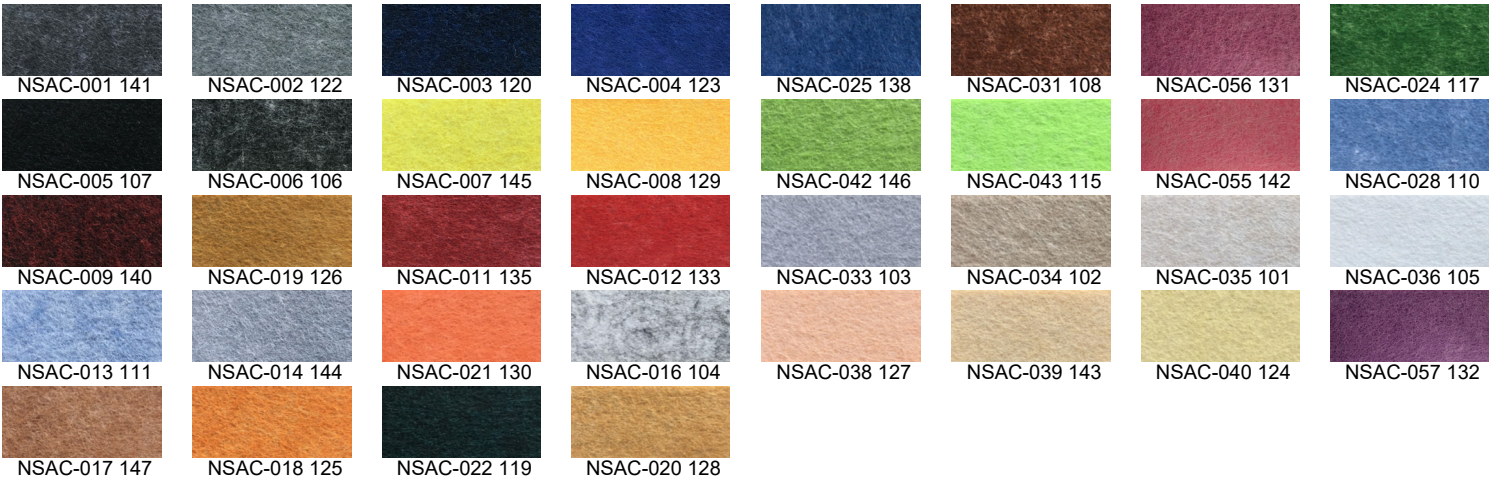

## ACOUSTIC WOOD TEXTURE OPTIONS

