


## LED EXIT SIGN & LIGHT BAR

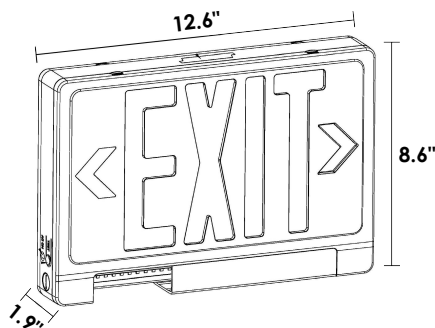

### FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Input Voltage: 120/277VAC 60Hz
- **Slim, and bright Light Bar, LED 4W**
- Test button and charge indicator light
- Backup time: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II, Range: 8m
- Operating Temperature: 14°F - 104°F
- Overcharge & Over-discharge protection
- 3.6V 300mAh Nickel-Cadmium battery, light last more than 90 minutes after power failure.

### HOUSING

Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish. Aesthetically pleasing, curved face, rounded corner design. Test switch provided.



### MOUNTING

EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

### WARRANTY

5 year limited warranty on all electronics and housing. Battery pro-rated for five years.

**EXAMPLE:** LE-CXPL-U1-RW-N-LB

Series	Face No.	Letters	Battery	LED Light	Listings
LE-CXPL	U1 Single	RW (Red) GW (Green)	N Nickel-cadmium batteries	LB Light Bar	 

Enter configuration: \_\_\_\_\_

