


|          |      |
|----------|------|
| Project: | Date |
| Type:    |      |
| Model:   |      |

## Features:

|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>HOUSING MATERIALS</b>     | Extruded aluminum alloy #6063<br>Powder coating, T=60~80 um. |
| <b>FINISH</b>                | Black / Graphite / Silver                                    |
| <b>REFLECTOR</b>             | Optical reflector efficiency >85%                            |
| <b>LED</b>                   | NICHIA                                                       |
| <b>OPERATING TEMPERATURE</b> | -4°F to 104°F                                                |
| <b>POWER CABLE</b>           | H05RN-F 3X1.0mm <sup>2</sup> L=0.3m (High voltage)           |
| <b>FIXTURE IP/ IK Rating</b> | IP67 Rated / IK10                                            |

## OPTICS

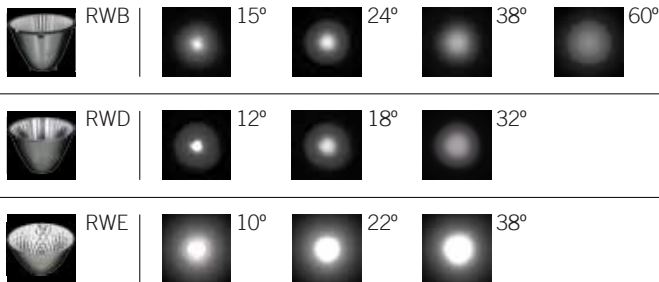

## FINISH OPTIONS



Example: RWB-11L30K-D24-Z-BK



| Series                               | Lumens (CCT)                                 |                                              |                                              | Beam Angle        |                   |                   |                   | Voltage                   | Finish                |
|--------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|-------------------|-------------------|-------------------|-------------------|---------------------------|-----------------------|
| <b>RWB</b><br>Wall light<br>10 Watts | <b>11L30K</b><br>11L (3000K)<br>1,170 Lumens | <b>13L40K</b><br>13L (4000K)<br>1,300 Lumens | <b>13L50K</b><br>13L (5000K)<br>1,335 Lumens | <b>D15</b><br>15° | <b>D24</b><br>24° | <b>D38</b><br>38° | <b>D60</b><br>60° | <b>Z</b><br>Z = 120 Volts | <b>BK</b><br>Black    |
| <b>RWD</b><br>Wall light<br>18 Watts | <b>14L30K</b><br>14L (3000K)<br>1,432 Lumens | <b>15L40K</b><br>15L (4000K)<br>1,590 Lumens | <b>16L50K</b><br>16L (5000K)<br>1,684 Lumens | <b>D12</b><br>12° | <b>D18</b><br>18° | <b>D32</b><br>32° |                   |                           | <b>SV</b><br>Silver   |
| <b>RWE</b><br>Wall light<br>25 Watts | <b>24L30K</b><br>24L (3000K)<br>2,412 Lumens | <b>25L40K</b><br>25L (4000K)<br>2,590 Lumens | <b>26L50K</b><br>26L (5000K)<br>2,615 Lumens | <b>D10</b><br>10° | <b>D22</b><br>22° | <b>D38</b><br>38° |                   |                           | <b>GR</b><br>Graphite |

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Table with 4 columns: Series, RWB-10W, RWD-18W, RWE-25W. Rows include Power (10W, 18W, 25W), Lumens (1,170 to 2,615), IK Testing (IK10), Operating Temp. (-4°F to 104°F), and Input (120V).

DIMENSIONS

