


## DESCRIPTION

Introducing the LuminosoLED Outdoor Emergency Wallpack with Photocell! Ideal for outdoor spaces, these fixtures offer reliable emergency backup lighting when you need it most. Designed with an IP65 rating, you can confidently install them outdoors without fear of rain damage. Equipped with a nickel cadmium battery and advanced overcharge & over-discharge protection, these fixtures boast a 24-hour charging time and provide a backup lighting duration of 90 minutes.

## FEATURES

- Die-cast aluminum housing, finished with powder coating.
- LED chip: standard 80 CRI.
- 120-277VAC
- 0-10V dimming, dims down to 10%.
- 3 CCT Selectable allows for further customization based on your requirements.
- 90 Min 5W Battery back-up optional provides 680 Lumens.
- Built in 6Kv Surge Protector.
- IK08 & IP65 Rated.
- Built in Photocell with on/off switch.
- Operating Temperature: -40°F to 122°F
- Average life (L70) 70,000 hrs.

Project:	Date
Type:	
Model:	

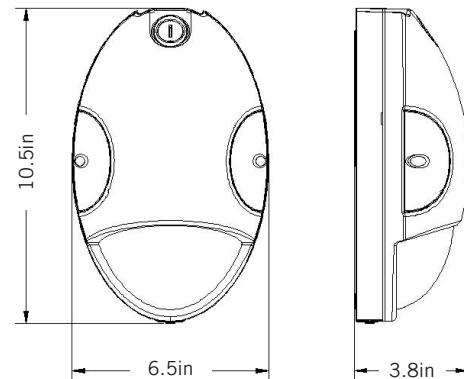

## ORDER INFORMATION

EXAMPLE: LRE-15W-CCTS-Y-BK



Series	Wattage	CCTS	Voltage	Emergency Battery Options	Finish
LRE Wall Pack / Sconce	15W 15 Watts	CCTS Selectable Color Temperature (3000K / 4000K / 5000K)	Y 120-277V	Blank Standard  EB Emergency Battery Backup <small>(Up to 90 minutes of operation when AC power is removed)</small>	BK Black  BZ Bronze

Enter configuration: \_\_\_\_\_

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

# LRE Series Wall Pack

LED Selectable CCT / with Emergency Battery Option



## PERFORMANCE

Model	Wattage	Lumens (100° Beam)	CCT Selectable	Efficacy	CRI	Power Factor	Voltage & Frequency
LRE	15W	1,740Lm	3000K	130Lm/W	>80	>0.9	120-277V 50/60Hz
		1,814Lm	4000K	138Lm/W			
		1,775Lm	5000K	133Lm/W			

## PHOTOMETRIC

