

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Coated aluminum, anodized powder coating. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
GLASS LENS	Tempered step glass. T=4mm
DIMMABLE	Not dimmable
CABLE GLAND	Nickel coated copper
GASKET	Tooling shaped seal
PCB	Excellent heat conductivity aluminum.
SPIKE	ABS
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=2.0m (low voltage)
FIXTURE IP/ IK Rating	IP66 Rated / IK07

OPTICS



RGG



30°



45°



RGG

FINISH OPTIONS



Graphite
RAL7037



Silver Gray
RAL9022



Black
RAL9005

Example: RGG-9L50K-D45-X-GR



Series	Lumens (CCT)			Beam Angle		Voltage	Finish
RGG 9.8 Watts	7L20K 7L (2000K) 790 Lumens	8L30K 8L (3000K) 862 Lumens	9L50K 9L (5000K) 960 Lumens	D30 30°	D45 45°	X X = 24 Volts Requires remote 24V transformer.	BK Black
							GR Graphite
							SG Silver Gray


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RGG
Power	9.8W
Lumens	790 (20K) 862 (30K) 960 (50K)
IP Rating	IP66
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

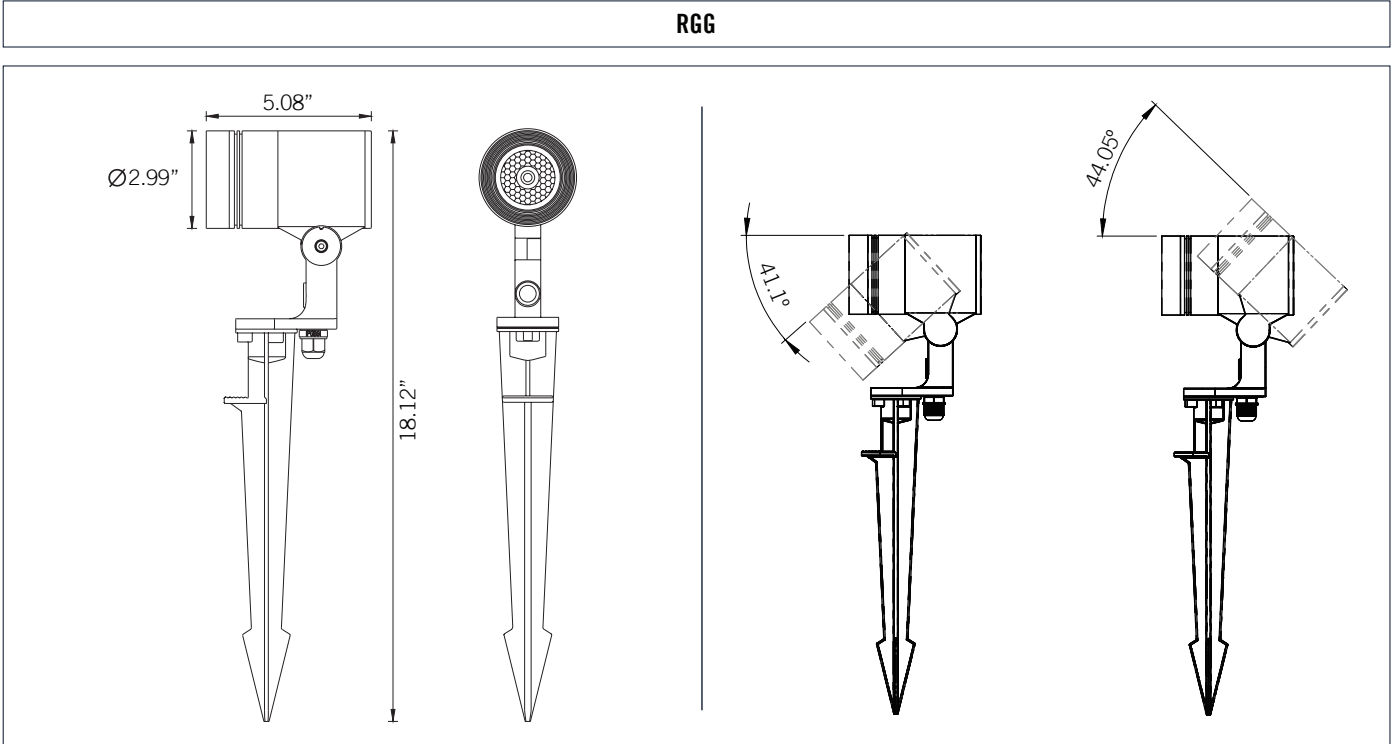

PHOTOMETRIC CURVES

