

Project:	Date
Type:	
Model:	

DESCRIPTION

Experience versatility with our 4-inch LED round trims featuring a selectable color temperature switch, providing seamless adaptation to diverse applications. The retrofit design, complemented by a smooth reflector, ensures effortless installation, making it compatible with both our LED dedicated housings and most standard 4-inch housings. These trims are designed for Wet locations, guaranteeing durability and optimal functionality in a variety of environments. Illuminate your space with confidence and style.

PRODUCT SPECIFICATIONS

- Spun aluminum trim dissipates heat from electrical components.
- 3 clip retention on unit for easy installation.
- One light J-Box.
- E26 medium screw-base Edison adapter provides easy installation into incandescent housings.

LED LIGHT ENGINE

- Dimming down to 10% with CL / TRIAC (at 120V only)
- CCT SELECTABLE: 2700K, 3000K, 3500K, 4000K, and 5000K
- CRI 90
- Long life LED chips guaranteed up to 50,000hours.


LISTINGS

- UL Listed
- Wet location rated
- RoHS compliant
- Tested in accordance with IESNA LM79 & LM80

DL-4-RSE-CCTS 4 INCH ROUND TRIM SMOOTH / CCT SELECTABLE



DIMENSIONS

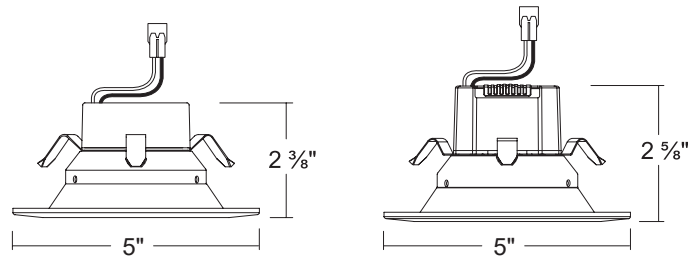

ORDER INFORMATION

EXAMPLE: DL-4-RSE-23-11-CCTS-Z-W



Series	Reflector	Mount	Wattage	CCT Selectable	Voltage	Finish
DL 4 4 inch Trim	RSE Round Smooth Reflector	23 Quick Connect	11 11 Watts	CCTS Selectable Color Temperature (2700K / 3000K / 3500K / 4000K / 5000K)	Z Z = 120V Y Y = 120-277V* (Dimmable at 120V)	W White

Enter configuration:

* Dimmable at 120V Only

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Watts	Voltage	CRI	Lumens				
11	120V / 120-277V	90	650	670	690	700	710
			27K	30K	35K	40K	50K

COLOR TEMPERATURE SELECTABLE



TRIAC Dimmer Compatibility

List of Triac Dimmer Switch		
Mfr	Model #	Dimming Rate
Leviton	1A1505 / 1C1605	10 - 100%
Leviton	6631 / 6633	10 - 100%
Lutron	CT-603PG / CT-600PR	10 - 100%
Lutron	DV-600PR / DV603PG	10 - 100%
Lutron	DVW-603PGH / DVCL-153P	10 - 100%
Lutron	MACL-153M / TGCL-153P	10 - 100%
Lutron	S-600PR / S-2-LH	10 - 100%