

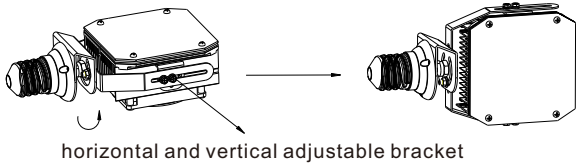


## Features & Benefits

- Retrofit Kits available in 100W - 180W
- Replaces 250W through 400W traditional Metal Halides
- Kit can be installed in enclosed fixtures without the risk of heat damage to the LED light component
- Rated lifespan of over 70,000 hours
- Kits available in 3000K, 4000K, 5000K CCT
- Operating Voltage : (120-277 VAC)
- Operating Temperature: -40°F to 104°F
- Power Supply Efficiency: >95%
- CRI: 80 / Beam Angle: 120°
- UL listed
- 100W: (120-277 VAC) 150W: (120-277 VAC) 180W: (120-277 VAC)
- IP64 Rated
- Die cast Aluminum
- 5 Year limited warranty

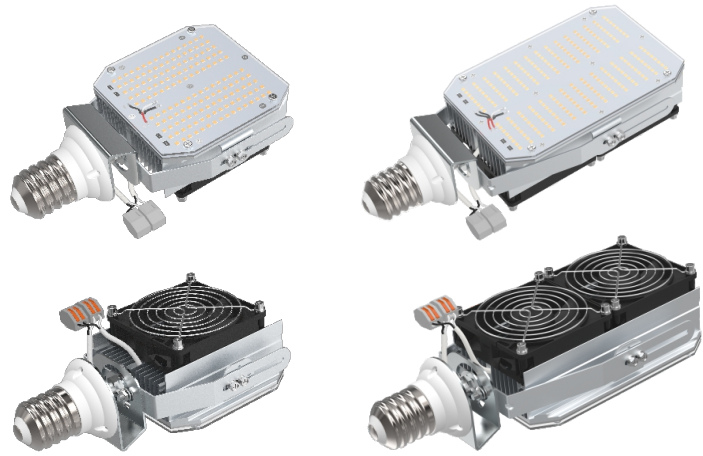

horizontal and vertical adjustable bracket

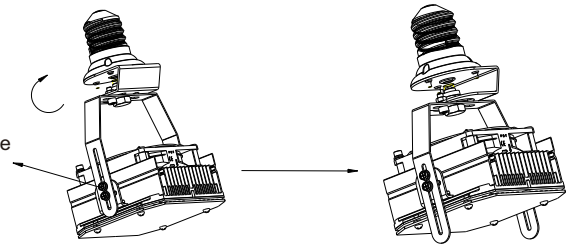

## ORDER INFORMATION

EXAMPLE: SAR-05-150W-50K-J-Y



## Performance Summary & Description




| Model    | Color | CCT           | Lumen (lm)<br>(±10%) | Beam<br>(angle°) | Efficacy | Voltage,<br>Frequency | Power<br>(±10%) | Current | CRI  | PF   |
|----------|-------|---------------|----------------------|------------------|----------|-----------------------|-----------------|---------|------|------|
| SAR-100W | 5000K | White         | 13,000               | 120°             | 130 LPW  | AC120-277V<br>50/60Hz | 100             | 1.2A    | > 80 | ≥0.9 |
|          | 4000K | Neutral White | 13,000               |                  |          |                       |                 |         |      |      |
|          | 3000K | Warm White    | 11,500               |                  |          |                       |                 |         |      |      |
| SAR-150W | 5000K | White         | 19,500               | 120°             | 130 LPW  | AC120-277V<br>50/60Hz | 150             | 1.8A    | > 80 | ≥0.9 |
|          | 4000K | Neutral White | 19,500               |                  |          |                       |                 |         |      |      |
|          | 3000K | Warm White    | 17,200               |                  |          |                       |                 |         |      |      |
| SAR-180W | 5000K | White         | 23,400               | 120°             | 130 LPW  | AC120-277V<br>50/60Hz | 180             | 2.1A    | > 80 | ≥0.9 |
|          | 4000K | Neutral White | 23,400               |                  |          |                       |                 |         |      |      |
|          | 3000K | Warm White    | 20,700               |                  |          |                       |                 |         |      |      |

Enter configuration:




\*\* Special Order / contact vendor

Dimension (Unit:mm/inch):

100W

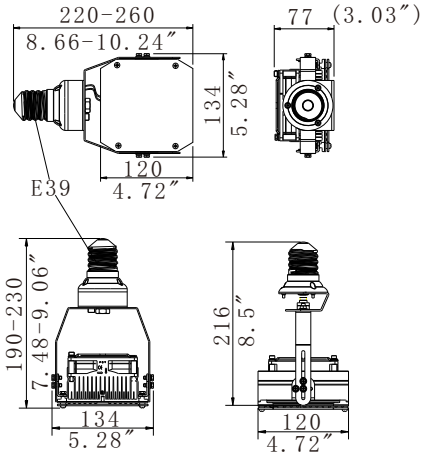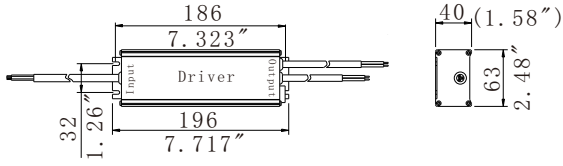

150W

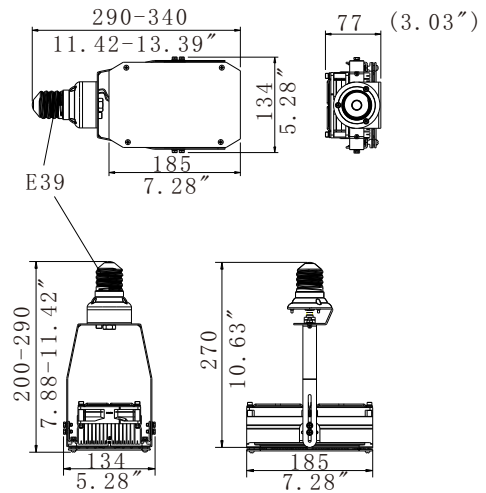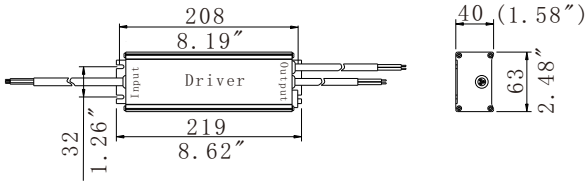

180W

