

Project		Date
Type		
Model		

## HBLP22 LED Back-Lit Panel

2x2 Panel

### Features

- Equipped with high grade PMMA diffuser, will not yellow over time.
- Voltage 120-277V.
- Lumen output from 2,586 - 5,100lm
- Efficacy from 125 - 134lm/W.
- Power Factor: >0.9
- Working Current: 0.5A
- Lifespan: 50,000 hours
- Increase energy saving with 0-10V dimming.
- Back-lit LED panel allows for better light uniformity, and improves efficiency.
- Operating temperature is -5°F to 120°F
- ETL Listed
- DLC Listed
- Mounting: Recessed.



Driver terminal box with knockouts, makes for easier installation.

### ORDER INFORMATION

EXAMPLE: HBLP22-30W-Y-40K



Series	Wattage	Voltage	CCT	Emergency Back-up Battery
HBLP22	20W	Y = 120-277V	35K = 3500K	Blank = None EM = Emergency Back-up Battery
	30W		40K = 4000K	
	40W		50K = 5000K	


Enter configuration:

\*\* Special Order

## PERFORMANCE DATA

MODEL	WATTS	VOLTAGE	CRI	3500K		4000K		5000K	
				LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
HBLP22	20W	120-277VAC	80	2,586	128lm/W	2,611	131lm/W	2,680	134lm/W
	30W			3,860	130lm/W	3,900	130lm/W	4,100	133lm/W
	40W			4,745	120lm/W	5,000	125lm/W	5,100	127lm/W

## DIMENSIONS

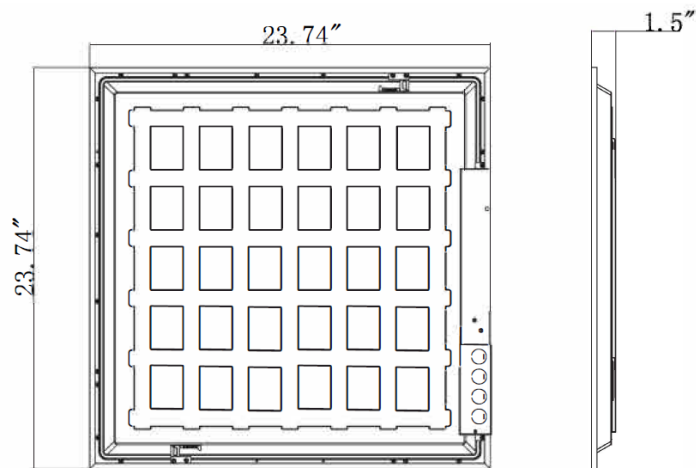

## PHOTOMETRICS

