

Project:	
Type:	
Model#	

LFL Series LED Flood Light

PRODUCT DESCRIPTION

The Luminoso LFL series combines modern styling with the latest LED technology. They are available in 15, 30, and 50 watts. The lumen output make this product ideal for nearly any exterior lighting application. With up to 70% energy savings over its traditional counterparts.

PERFORMANCE SUMMARY

Efficacy: 110 - 115 Lm/W
Delivered Light Output: 1,650 - 5,750 Lumens
Input Power: 15 - 50 Watts
CRI: Ra> 80
CCT: 4000K 5000K
Input Voltage: 110-277V
Power Factor: >0.95 (120V)
Frequency: 50/60Hz
Standard Warranty: 5 Years
Standard Lifetime: 50,000 hours
IP Rating: IP66 / Wet Rated
Die-cast aluminum housing
National listing lab tested with IES standards



REGULATORY & VOLUNTARY QUALIFICATIONS

UL Listed

ORDER INFORMATION

EXAMPLE: LFL-50W-Y-50K-L-26-BK-PC



Series	Wattage	Voltage	CCT	Beam	Mount	Finish	Option
LFL	15W 30W 50W	Y = 120-277V	40K = 4000K 50K = 5000K	L = 100°	22= Tunnion Mount	BK = Black	PC = Photocell


Enter configuration:

** Special Order / contact vendor

Series / Performance

Series No.	LFL-15W	LFL-30W	LFL-50W
Power	15W	30W	50W
Lumens	1,650	3,300	5,750
Efficacy	110 Lm/W	110 Lm/W	115 Lm/W
Ambient Temp. use	-13°F to 113°F	-13°F to 113°F	-13°F to 113°F
Dimensions (L x W x H)	4.6 x 4.9 x 3.8 in	5.5 x 7.6 x 5.9 in	5.7 x 9 x 7.5 in
Input	120-277V AC	120-277V AC	120-277V AC

Dimension

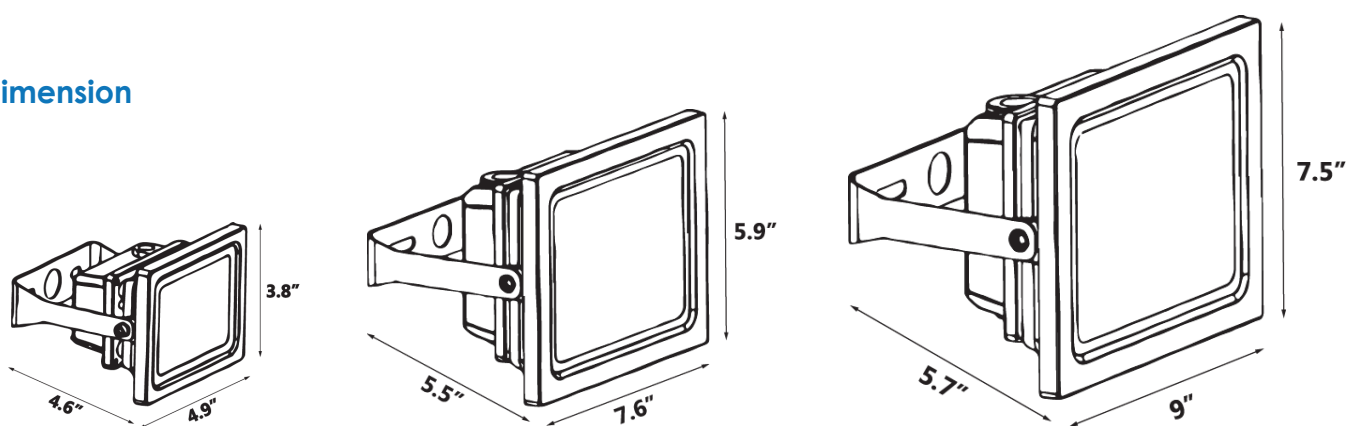

Dimension

