

LSB-B Series SOLAR LED Bollard

PRODUCT DESCRIPTION

- High brightness LED 44 chips, 0.09W each, 4W LED Power.
- 2*4.5Ah 6.4V LITHIUM LIFEPO4 battery, with fast charging, working temperature 5°F to 149°F
- 9.5 Watt Monocrystalline Solar Panel. Grade A Solar Cells Height:
- 36.1 x Width 15.4 in / 25 Lbs.
- INTERPON AKZONOBEL coating.
- 5 Years Warranty.

PERFORMANCE SUMMARY

Delivered Light Output: 500 Lumens

Watts: 4 Watts


CCT: 3000K, 4000K, 5000K

Standard Lifetime: Designed to L70 minimum 50,000 hours

IP Rating: IP65

Charging: 6 Hours / Day, direct sun light

Atonomy: 23 Hours

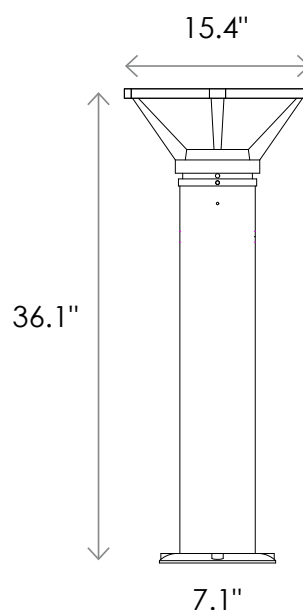

Brightness:

4W



= 35W



= 60W



ORDER INFORMATION

EXAMPLE: LSB-B-4W-SP-40K-5M-29-BK



Series	Size	Watts	Voltage	CCT	Optics	Mount	Finish
LSB	B	4W	SP=Solar Power	30K = 3000K 40K = 4000K 50K = 5000K	5M	29 = Anchor Bolts	BK = Black

Enter configuration:

** Special Order / contact vendor