

LSB-C Series SOLAR LED Bollard

PRODUCT DESCRIPTION

- 3.5W LED Power.
- 4.5Ah 6.4V LITHIUM LIFEPO4 battery, with fast charging, working temperature 5°F to 149°F
- 6 Watt Monocrystalline Solar Panel. Grade A Solar Cells Height:
- 36 x Width 10.2 in / 22 Lbs.
- INTERPON AKZONOBEL coating.
- 5 Years Warranty.

PERFORMANCE SUMMARY

Delivered Light Output: 425 Lumens

Watts: 3.5 Watts


CCT: 3000K, 4000K, 5000K

Standard Lifetime: Designed to L70 minimum 50,000 hours

IP Rating: IP65

Charging: 6 Hours / Day, direct sun light

Atonomy: 23 Hours full charge

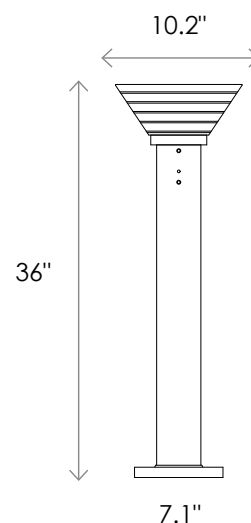

Brightness:

3.5W



= 20W



= 60W



ORDER INFORMATION

EXAMPLE: LSB-C-3.5W-SP-40K-5M-29-BK



Series	Size	Watts	Voltage	CCT	Optics	Mount	Finish
LSB	C	3.5W	SP=Solar Power	30K = 3000K 40K = 4000K 50K = 5000K	5M	29 = Anchor Bolts	BK = Black

Enter configuration:

** Special Order / contact vendor