

Project:	
Types:	
Model#	

PRODUCT DESCRIPTION

The Luminoso MWPK 20-40W series combines traditional styling with the latest LED technology. The high pressure die cast housing along with anti-static powder painting makes this product ideal for exterior applications. The MWPK's highly efficient cooling system allows lower running temperatures translating into a maximized product life. The wall pack has a built in UL class driver and is also rated for damp and wet locations. Ideal for entry ways, area perimeters, stairwells and hallways this product offers the added security and cost effectiveness to meet any demand.


MWPK-20W / 40W LED Wall Pack




PERFORMANCE SUMMARY

Efficacy: 100 / 112 Lm/W
Power consumption: 20W / 40W Watts
Delivered Light Output: 2,170Lm (40K) 2,000Lm (50K) / 4,636Lm (40K) 4,500Lm (50K)
CRI: Ra>70
CCT : 4000K - 5000K
Input Voltage: 120 - 277 VAC
Input current: 0.33 - 0.14 Amps (120-277V)
THD: <20% (at 120V)
Power factor: > 0.9 (120V)
IP Rating: IP65
Standard Warranty: 5 Years
Non-dimmable
Standard Lifetime: Designed to L70 minimum 50,000 hours
Qualifications: UL Listed


Dimensions

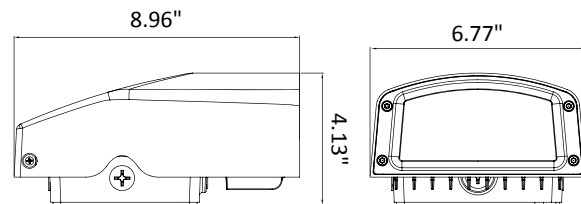


Luminous Intensity Distribution Curve **20W**

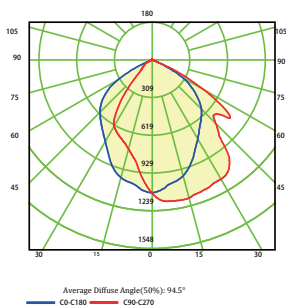


Illuminance at a Distance



Luminous Intensity Distribution Curve **40W**

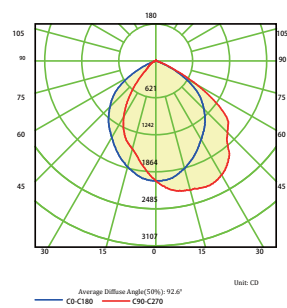

Illuminance at a Distance



ORDER INFORMATION

EXAMPLE: MWPK-14-20W-50K-3M-Y-BZ



Series	Mount	Wattage	CCT	Optics	Voltage	Finish	Options
MWPK	14 = Direct Mount	20W 40W	40K = 4000K 50K = 5000K	3M = 180° (Half Round)	Y = 120-277V	BZ = Bronze	PC-120V PC-277V

Enter configuration:

** Special Order / contact vendor

