

Project:

Type:

Model:

Features:

HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=20-25 µm. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Die-cast aluminum, powder coated.
LED	SMD3030
DIMMABLE	Yes*
MOUNTING SLEEVE/ J-BOX	Zinc plated sleeve, grey powder coated T=60-80 µm
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK10

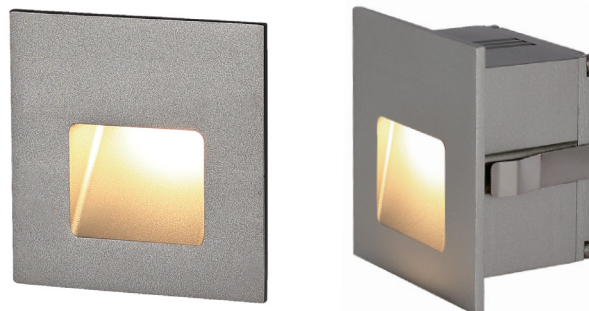
FINISH OPTIONS

Graphite
RAL7037

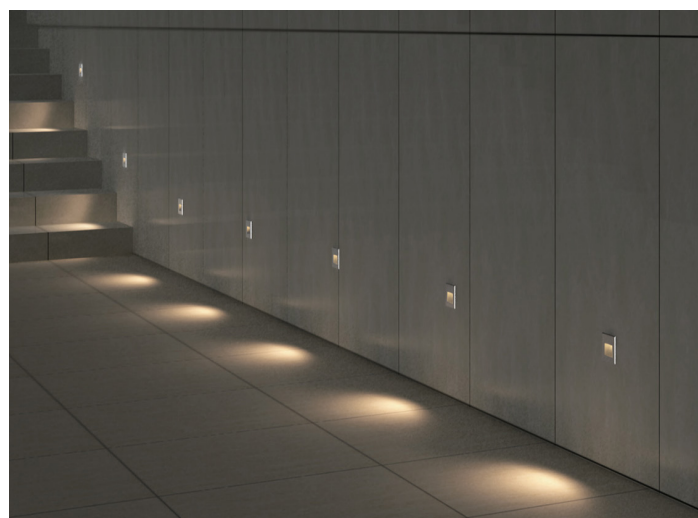
Silver
RAL9006

Bronze
RAL8019

Black
RAL9005

White
RAL9003


RSR


Example: RSR-OL30K-X-WH


Series	Lumens (CCT)			Voltage	Finish
RSR 2.6 Watts	OL20K OL (2000K) 22 Lumens	OL30K OL (3000K) 25 Lumens	OL40K OL (4000K) 32 Lumens	X X = 24 Volts Requires remote 24V transformer. For dimming, refer to specs of transformer you are using.*	BK Black WH White GR Graphite SV Silver BZ Bronze

Enter configuration:

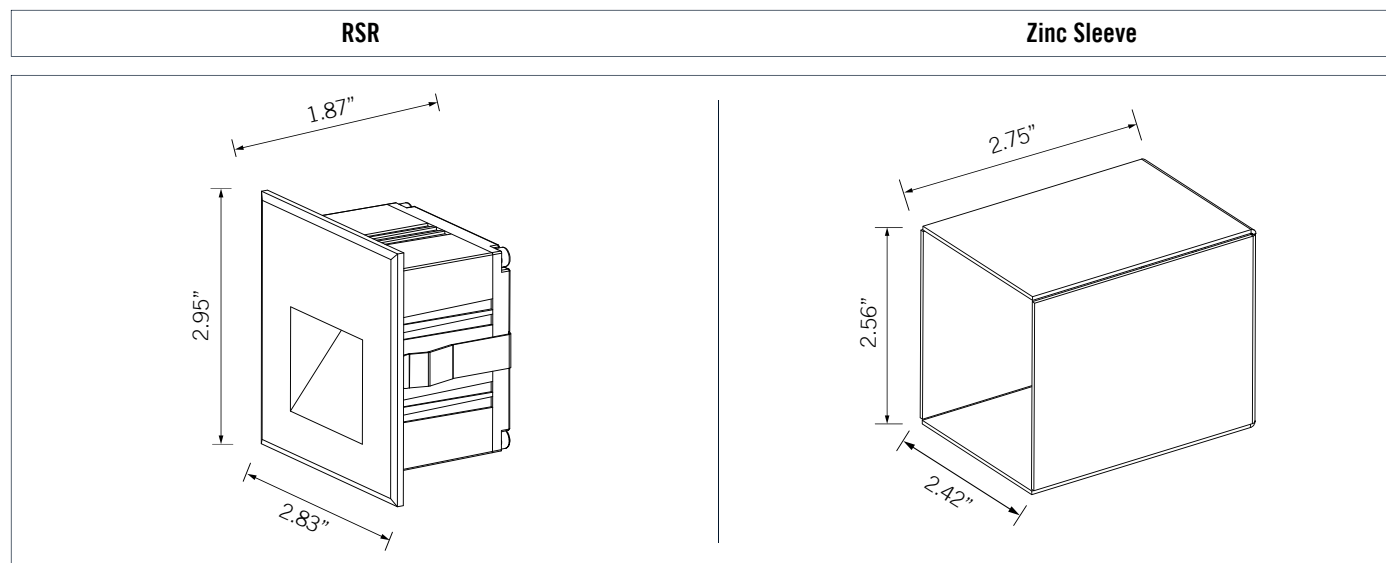
** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSR
Power	2.6W
Lumens	22 (20K) 25 (30K) 32 (40K)
IP Rating	IP65
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS



PHOTOMETRIC CURVES

