
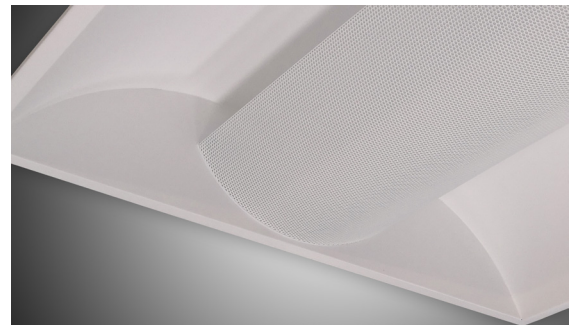


Project		Date
Type		
Model		

TBT24 LED 2x4 Architectural Troffer

Performance

TBT is a high performance direct/indirect fixture with sleek smooth curves. Its direct and indirect light results in a soft look that blends itself into the ceiling with appealing, illumination. The center perforated basket and the gull wing reflectors gives it an elegant symmetry. The even light distribution provides illumination across the reflector surfaces for a true direct/ indirect architectural luminaire.

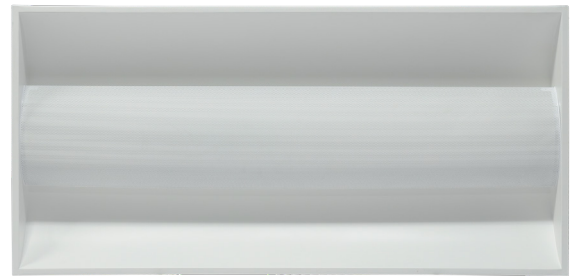

Features

- 40 Watts
- Voltage 120-277V.
- Lumen output from 4,230lm
- Available in 3500K
- Efficacy up to 107lm/W.
- Power Factor: >0.9
- Working Current: 0.5A
- Lifespan: 50,000 hours
- Increase energy saving with 0-10V dimming.
- Perforated basket and the gull wing reflectors.
- Operating temperature is -5°F to 120°F
- UL Listed
- Mounting: Recessed, Lay-in.

ORDER INFORMATION

EXAMPLE: TBT24-18-40W-35K-J-Y



Series	Mounting	Wattage	CCT	Beam	Voltage
TBT24 Troffer	18 18 = Lay in	40W 40 Watts	35K 3500K	J J = 120°	Y Y = 120-277V



Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.


PERFORMANCE DATA

				3500K	
MODEL	WATTS	VOLTAGE	CRI	LUMENS	EFFICACY
TBT24	40W	120-277VAC	80	3,900	103lm/W

DIMENSIONS

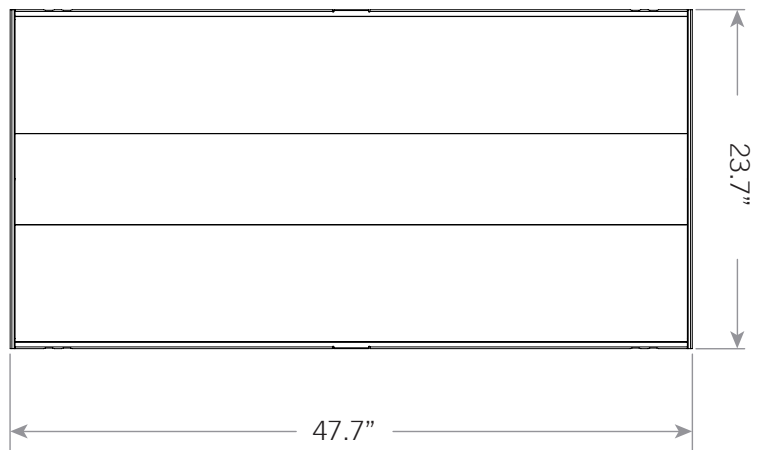

PHOTOMETRIC DATA

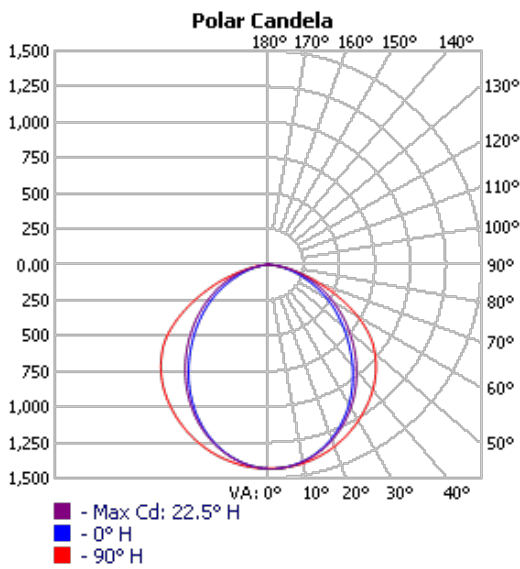

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	1,099.8	28.2
0-40	1,792.9	45.9
0-60	3,154.9	80.8
60-90	742.0	19
70-100	277.8	7.1
90-120	3.4	0.1
0-90	3,896.9	99.8
90-180	6.4	0.2
0-180	3,903.3	100