

Project		Date
Type		
Model		


VPR 8FT Series Vapor Tight

PRODUCT DESCRIPTION

This product's low profile design makes it a perfect replacement for T8 and T5 fixtures. Its wide distribution angle is ideal for lighting applications such as garages, stairwells, warehouses, manufacturing and service areas. Lastly, the VPR series' exceptional 50,000+ hours of operation and wattage reductions of over 50% from its traditional counterparts makes it a truly revolutionary product.

PERFORMANCE SUMMARY

Efficacy: 130 Lm/W
Delivered Light Output: 7,800 and 10,400 Lumens
Input Power: 60, and 80 Watts
CRI: Ra>80
CCT: 4000K, 5000K
Input Voltage: 120-277 VAC
Input current: 0.4 -0.17A
THD: <20% (120V)
Power Factor >0.95 (120V)
Frequency: 50/60Hz
Standard Warranty: 5 Years
Standard Lifetime: Designed to L70 minimum 50,000 hours
Mounting: Direct Mount
Dimming: 0-10v dimming, 10%-100% smooth linear dimming
IP Rating: IP66
Operating temp: -40°F to 104°F

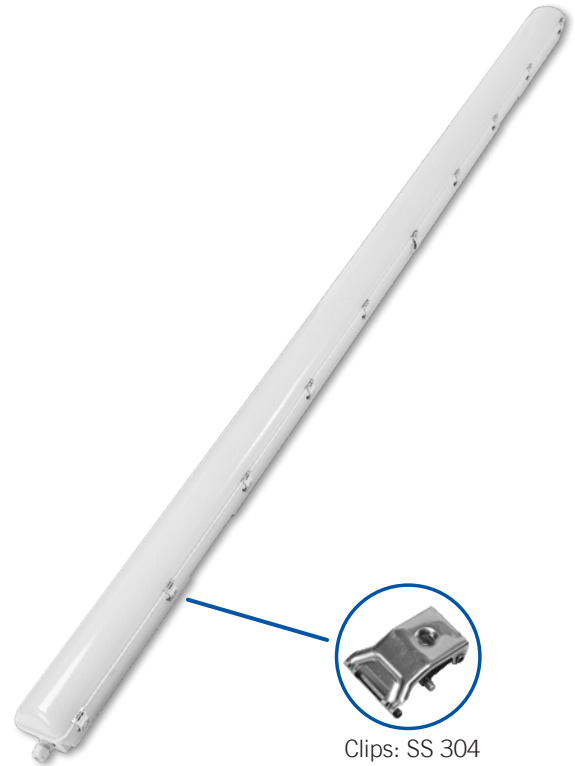

ORDER INFORMATION

EXAMPLE: VPR-14-60W-40K-J-Y-FR



Series	Mount	Wattage	CCT	Optics	Voltage	Lens
VPR	14 = Direct Mount	60W	40K = 4000K	J = 120°	Y = 120-277V	FR = Frosted
		80W	50K = 5000K			

Enter configuration:

** Special Order

PERFORMANCE DATA

Model	VPR-60W	VPR-80W
System Power	60W	80W
Voltage	120-277VAC	
Frequency	50/60Hz	
Lumen output (Max)	7,800lm	10,400lm
Efficacy	130 lm/W	
Diffuser	Injection molded / UV stabilised polycarbonate	
Housing	Injection molded, polycarbonate	
Finish	Light grey (RAL7035)	
LED type	SMD2835	
CCT	4000K / 5000K	
CRI	80	
PF	>0.9	
Beam angel	120°	
IP	IP66	
IK	IK08	
Installation	Direct mount	
Operating Temp.	-40°F to 104°F	
Certificate	UL / DLC Premium	
Product size	L 95.1 x W 4.52 x H 4.13 in	
Carton size	L 96.3 x W 9.76 x H 8.74 in	
Qty / CTN	2 pcs	

DIMENSIONS

