

Project		Date
Type		
Model		

VPS Series LED Vapor Tight

PRODUCT DESCRIPTION

The Luminoso VPS Series is a versatile linear fixture suitable for a wide range of applications. With an IP66 and IK10 rating, it thrives in both interior and exterior settings like parking areas, corridors, warehouses, factories, airports, and supermarkets. Its robust build is matched only by its cutting-edge technology, utilizing premium LED arrays for an impressive 130 lumens per watt output. Available in 4000K or 5000K color temperatures, with lengths from 2 and 4 feet and wattage options of 30 to 50 watts.

SPECIFICATION FEATURES

Efficacy: 110-130 Lm/W
Delivered Light Output: 3,750 to 6,200 Lumens
CCT: 4000K, 5000K
Wattage: (2FT) 30W / (4FT) 40W, and 50W
CRI: Ra>80
Input Voltage: 120-277 VAC
Input current: 0.4 - 0.17A
THD: <19% (120V)
Power Factor >0.95 (120V)
Frequency: 50/60Hz
Standard Warranty: 5 Years
Standard Lifetime: Designed to L70 minimum 50,000 hours
Mounting: Direct Mount or Suspension kit available
Dimming: Not dimmable
IP Rating: IP66
Operating temp: -4°F to 122°F



ORDER INFORMATION

EXAMPLE: VPS4-40W-Y-40K-J-14-FR



Series	Wattage	Voltage	CCT	Beam	Mount	Lens	Motion Sensor
VPS2 2FT Vapor Tight	30W 30 Watts	Y 120-277V	40K 4000K	J 120°	14 Direct Mount	FR Frosted	Blank No Sensor
VPS4 4FT Vapor Tight	40W 40 Watts		50K 5000K		3HK 3 Meter Suspension Kit		MS Motion Sensor
	50W 50 Watts		For 3000K contact vendor		5HK** 5 Meter Suspension Kit		

Enter configuration: _____


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Model	Voltage	Power	CCT	CRI	Max Lumen	Lifetime	Dimension	Carton Size	Qty/CTN
VPS2-2FT	120-277V	30W	40K / 50K	>80	3,800 / 3,900	50,000 hrs	23.6 x 3.5 x 2.4 in	37.6 x 8.1 x 8.7 in	6
VPS4-4FT		40W			4,962 / 5,200		47.2 x 3.5 x 2.4 in	37.6 x 8.1 x 8.7 in	
VPS4-4FT		50W			6,000 / 6,200		47.2 x 3.5 x 2.4 in	57.1 x 8.1 x 8.7 in	

DIMENSIONS

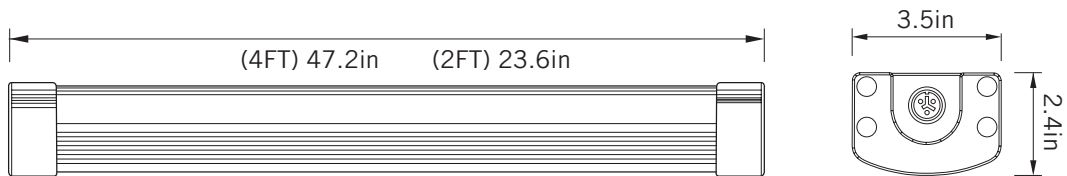

ACCESSORIES

LC (Link Cable)



- 6IN-LC (6 in)
- 1M-LC (1 Meter)
- 2M-LC (2 Meter)

Mounting Clips included



PC (Power Cable)



- 1M-PC (1 Meter)
- 2M-PC (2 Meter)

Mounting Screws included

