


## DESCRIPTION

Introducing our Cylinder Outdoor LED Wall Light, a sleek and durable fixture for both homes and businesses. Crafted with a cast aluminum square backplate, it can withstand extreme conditions, including saltwater environments, thanks to its UV protectant. This dimmable light source offers flexibility, with adjustable wattage, color temperature, and the option to enable or disable the photocell. Plus, it comes with a switch for full, up, or downlight options. Elevate your outdoor spaces with this stylish and versatile lighting solution.

## FEATURES

- Optional 4 Optics: 15°, 25°, 40° and 60°.
- COB LED chip: standard 90 CRI for enhanced performance.
- 0-10V dimming, dims down to 10%.
- Available in 3", 4", and 6".
- Wattage & CCT Selectable allows for further customization based on your requirements.

Project:	Date
Type:	
Model:	

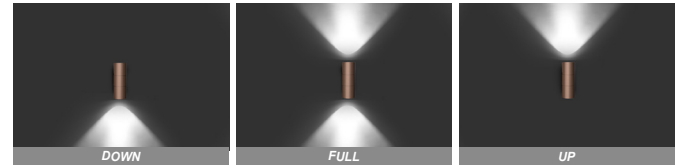

## ORDER INFORMATION

EXAMPLE: LCW4-WS-Y-CCTS-25-BK



Series	Wattage Selectable	Voltage	CCTS	Optics Options	Finish	Square Accessory
<b>LCW3</b> 3 inch Cylinder wall light	<b>WS</b> (10W / 8W / 6W)	<b>Y</b> 120-277V	<b>CCTS</b> Selectable Color Temperature (3000K / 4000K / 5000K)	<b>15D</b> 15° <b>25D</b> 25° <b>40D</b> 40° <b>60D</b> 60°	<b>BK</b> Black <b>BZ</b> Bronze <b>WH **</b> White	<b>SQA</b> Square Fit
<b>LCW4</b> 4 inch Cylinder wall light	<b>WS</b> (20W / 16W / 12W)					
<b>LCW6</b> 6 inch Cylinder wall light	<b>WS</b> (35W / 29W / 22W)					

Enter configuration:

\*\*Special order 6-8 weeks

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

# LCW Cylinder Wall Light


Specifications & Measurements




## PERFORMANCE

Model	Wattage Selectable	Lumens (40°)	CCT Selectable
3 inch	10W	965	3000K
		1,000	4000K
		1,050	5000K
	8W	785	3000K
		810	4000K
		840	5000K
	6W	605	3000K
		620	4000K
		600	5000K
Model	Wattage Selectable	Lumens (40°)	CCT Selectable
4 inch	20W	1,840	3000K
		1,950	4000K
		2,050	5000K
	16W	1,500	3000K
		1,570	4000K
		1,650	5000K
	12W	1,160	3000K
		1,220	4000K
		1,290	5000K
Model	Wattage Selectable	Lumens (40°)	CCT Selectable
6 inch	35W	3,050	3000K
		3,100	4000K
		3,140	5000K
	29W	2,550	3000K
		2,710	4000K
		2,750	5000K
	22W	2,010	3000K
		2,150	4000K
		2,210	5000K

## DIMENSIONS

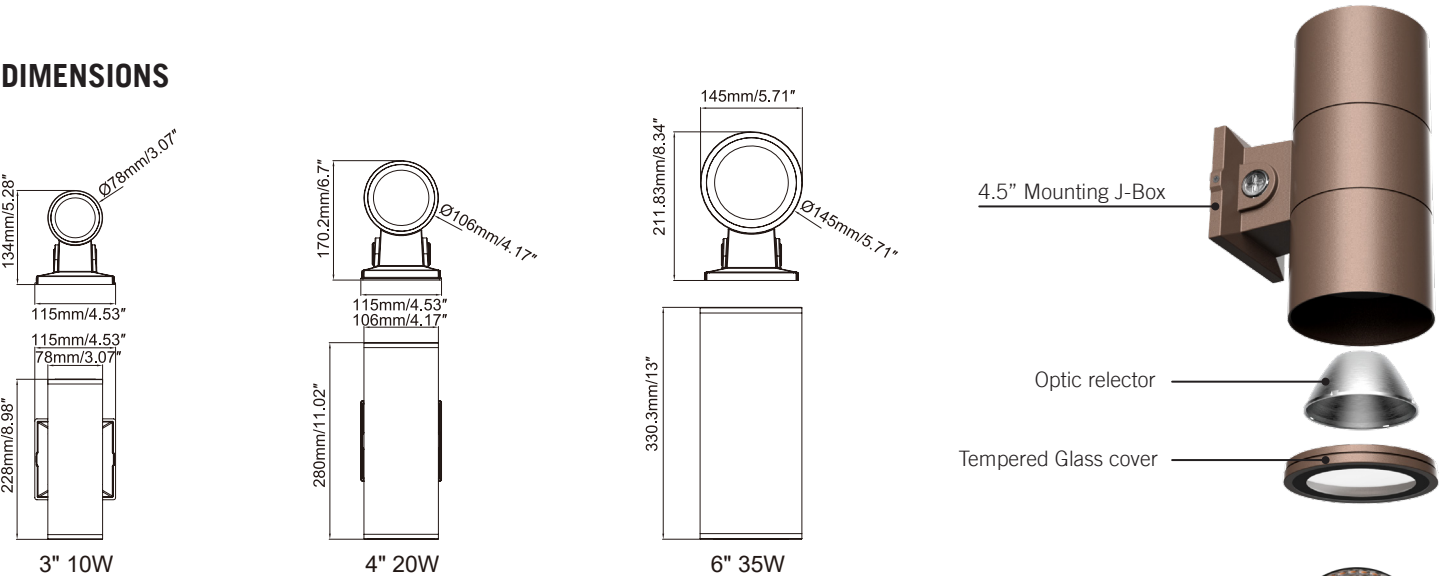

## PHOTOMETRIC

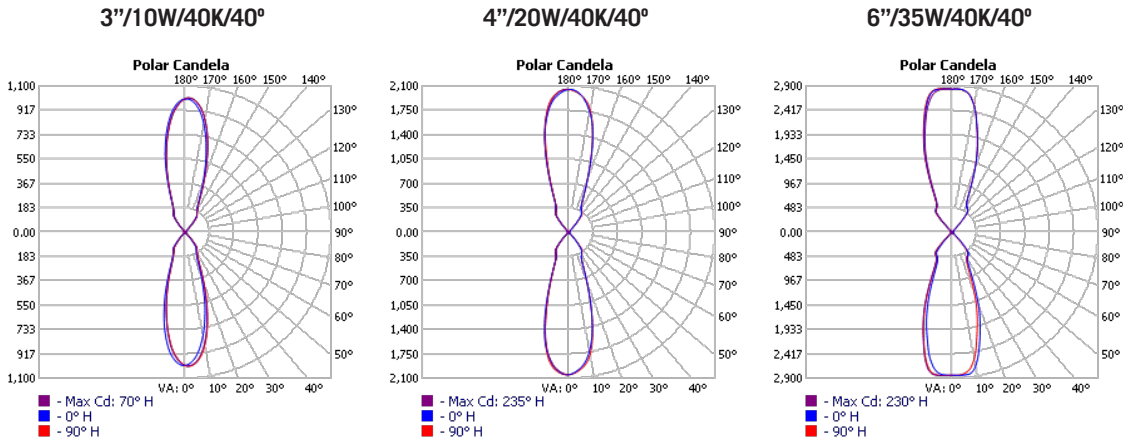

# LCW Cylinder Wall Light

Square Fit Accessory / Color code



## Square Fit Accessory



### Finish:



Bronze  
RAL8019



White  
RAL9003



Black  
RAL9017